

# Digitus® USB 2.0 - USB A to USB C Spiral Cable

AK-300430-006-S

EAN 4016032482543

**USB - Type A to USB - Type C Spring cable TPE USB 2.0, PD60W Max; 1m**

With the DIGITUS® USB 2.0 - USB A to USB C Spiral Cable, you can charge your smart devices such as smartphones, tablets etc. The charging power is 60W (20V/3A). In addition, you can synchronize your data with the PC or notebook at a data transfer rate of 480 Mbps. Thanks to the flexible length and spiral design, it can be used anywhere. Perfect in the car to charge your smartphone or as a spare cable for your desk, since the cable is easy to store anywhere.

**Flexible and highly robust spiral cable for charging and synchronizing**

- Data transfer rate of up to 480 Mbps
- Supports the USB PD (Power Delivery) specification - charging power of 60W (20V/3A)


- USB Type-C plug can be used on both sides
- Cable length: 0.32m
- Usable length/extendable up to: 1m

**Attributes**

- AWG: 32
- Color cable: black
- Connector 1: USB A, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 1m
- Shielding: Double shielding

| Logistics                           |              |             |            |            |             |                 |
|-------------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                                     | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| <b>Packaging Unit Carton</b>        | 200          | 6.75        | 44.00      | 51.50      | 29.00       | 65,714.00       |
| <b>Packaging Unit Inside</b>        | 10           | 0.34        | 30.00      | 6.00       | 24.00       | 4,320.00        |
| <b>Packaging Unit Single</b>        | 1            | 0.03        | 21.00      | 11.50      | 1.80        | 434.70          |
| <b>Net single without Packaging</b> | 1            | 0.03        | 1.00       | 100.00     | 1.00        | 0.00            |

## More images:

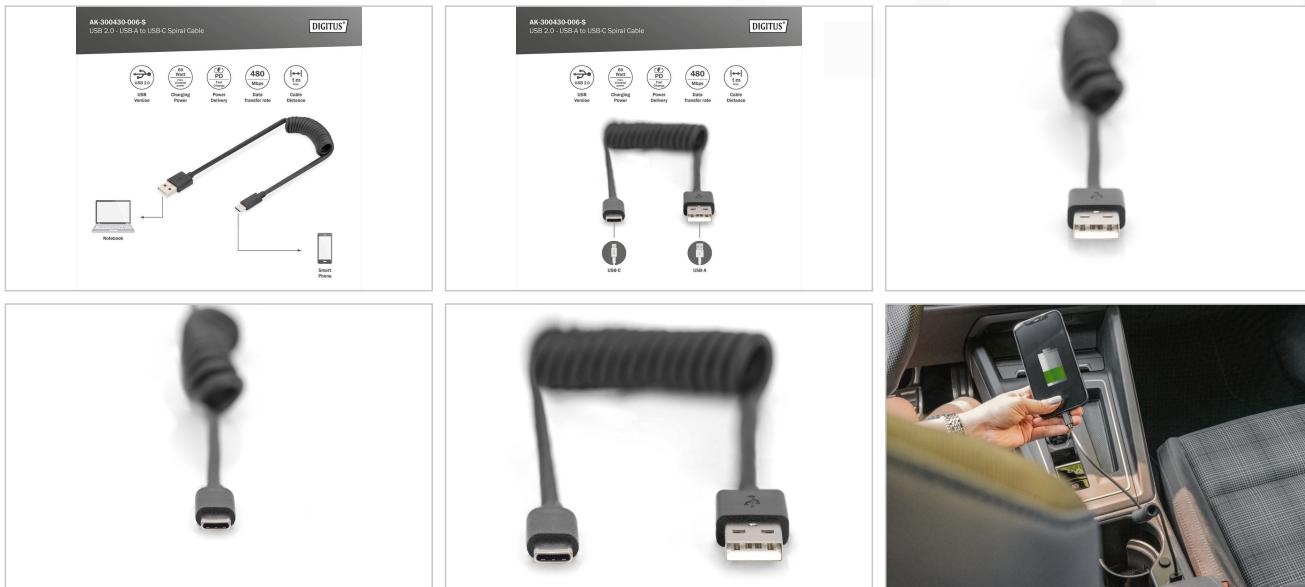

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)