

DIGITUS® USB-A - USB-C spiral cable, 1m

AK-300430-006-S

EAN 4016032482543



USB - Type A to USB - Type C Spring cable TPE USB 2.0, PD60W Max; 1m

With the DIGITUS® USB 2.0 - USB - A to USB - C spiral cable, you can charge your smart devices such as smartphones, tablets, etc. The charging power is 60W (20V/3A). You can also synchronize your data with your PC or laptop, with a data transfer rate of 480 Mbps. Thanks to its flexible length and spiral design, it can be used anywhere. Perfect for the car, for charging your smartphone or as a spare cable for your desk, as the cable can be easily stored anywhere.

Flexible and heavy-duty spiral cable for charging and synchronizing

- Data transfer rate up to 480 Mbps
- Supports the USB PD (Power Delivery) specification - charging power of 60W (20V/3A)

- USB Type-C plug can be used on both sides
- Cable length: 0.32m
- Usable length/extendable up to: 1m


Attributes

- AWG: 32
- Feritni filter: nema
- Kabel u boji: crni
- Konektor 1: USB A, utikač
- Konektor 2: USB C, utikač
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1 m
- oklop: dvostruki oklop

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	6.75	44.00	51.50	29.00	65,714.00
Packaging Unit Inside	10	0.34	30.00	6.00	24.00	4,320.00
Packaging Unit Single	1	0.03	21.00	11.50	1.80	434.70
Net single without Packaging	1	0.03	1.00	100.00	1.00	0.00

More images:

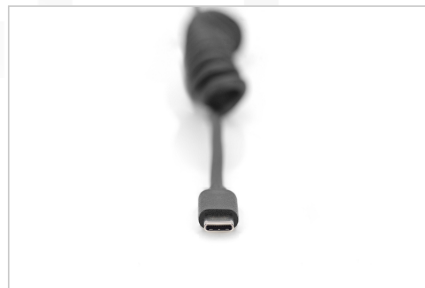

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com