# DIGITUS® HDMI Splitter, 1x2, 4K / 30 Hz

**DS-45340**

**EAN 4016032483656**




**4K HDMI Splitter, 1x2 4K/30Hz, black**

Distributes an HDMI input signal to two output displays. Supports a maximum resolution of 4K2K/30Hz. The EDID switch allows you to select between two modes (Copy: HDMI Output 1 / Auto Mode: Automatically compares HDMI Outputs 1 and 2, combines them into a new EDID, and sends it back to the HDMI input).

**Distributes an HDMI input signal to two output displays at a maximum resolution of 4K2K/30 Hz**

- Distributes an HDMI input signal to two output displays at a maximum resolution of 4K2K/30Hz
- EDID Support (2 modes) - 1: Copy - HDMI Output 1 / 2: Auto Mode - Compare & Create HDMI Outputs 1 & 2
- HDMI 1.4b
- HDCP 1.4
- Video bandwidth: 10.2 Gbps
- Compact design for easy and flexible installation
- Connections:
- 1x HDMI input (4K/30 Hz) - Signal source connection
- 2x HDMI Outputs (4K/30 Hz) - Connection to Display Device
- 1x Power Supply Input (DC 5V/1A), External Power Supply Connector
- 1 EDID selector switch
- Operating temperature: 0–40°
- ESD Protection
- Housing: Metal
- Dimensions: L 7 x W 6 x H 2 cm
- Weight: 125 g
- Color: black

**Attributes**

- Broj priključaka: 2
- HDTV-norma: Ultra HD 4K
- rezolucija maks.: 3840 x 2160 piksela, 30 Hz
- Izlaz signala: HDMI
- Priključci za video vezu: HDMI

**Package contents**

- 1 HDMI splitter
- 1x power supply (DC 5V/1A, 1.15 m)
- 1 user manual

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 40 | 11.27 | 25.30 | 35.00 | 44.50 | 39,404.80 |
| **Packaging Unit Inside** | 1 | 0.28 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 0.28 | 10.50 | 11.70 | 6.50 | 798.53 |
| **Net single without Packaging** | 1 | 0.12 | 7.00 | 6.00 | 2.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**




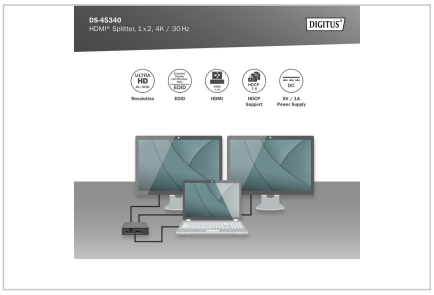

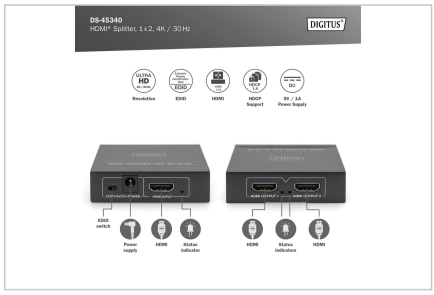





**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com