

DIGITUS® Basic IT PDU, 1-phase 32A, 24 x C13, 4 x C19, 3 m supply cable, IEC 60309 32 A plug

DN-95451

EAN 4016032485964



IT BASIC PDU, Vertical, 32A, 24 x C13, 4 x C19 IT BASIC PDU, Vertical, 32A, 24 x C13, 4 x C19

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology and laboratories. The individual C13 and C19 outlets are equipped with pull-out protection. It is designed for vertical installation, which saves height units and provides more space for additional devices. The socket strip with 28 outlets has excellent physical properties and is designed for an output of up to 8,000 W (250VAC / 32A), which enables the best performance to be achieved with the corresponding load.

Secure and professional power distribution solution for demanding IT requirements in network and server cabinets

- Pull-out protection on each output (for C13 and C19 standard cables)
- Vertical installation
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Integrated miniature circuit breakers, 2 x 16 A
- Mains cable: 4 mm², IEC60309 32 A plug

- Supply line: 3 m
- Max. Load: 8000 W / 250 V AC / 32 A (50/60Hz)
- Sockets: 24 x C13 socket outlet, 4 x C19 socket outlet
- Output current: C13 (10A), C19 (16A)
- Rated voltage: 230–250 VAC, 50/60 Hz
- Dimensions (L x W x D): 1388.5 x 45 x 60 mm
- Color: Black

Attributes


- Dodatne mogućnosti: Rastavljač strujnog kruga
- El. snaga: 7,3 kVA
- Faze: 1 fazni
- Izlazni priključci: IEC 60320 C13, IEC 60320 C19
- Struja: 32 A
- Ugrađivanje: Stalak 0U
- Ulazni utikač: IEC 60309 32A 1ph/N/PE 6h
- Volti: 230 V

Package contents

- Scope of delivery: 1 socket strip, 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	4	15.00	41.00	161.00	17.50	115,518.00
Packaging Unit Inside	1	3.75	0.00	0.00	0.00	0.00
Packaging Unit Single	1	3.75	160.00	20.00	8.00	25,600.00
Net single without Packaging	1	3.00	138.90	6.00	4.50	0.00

More images:

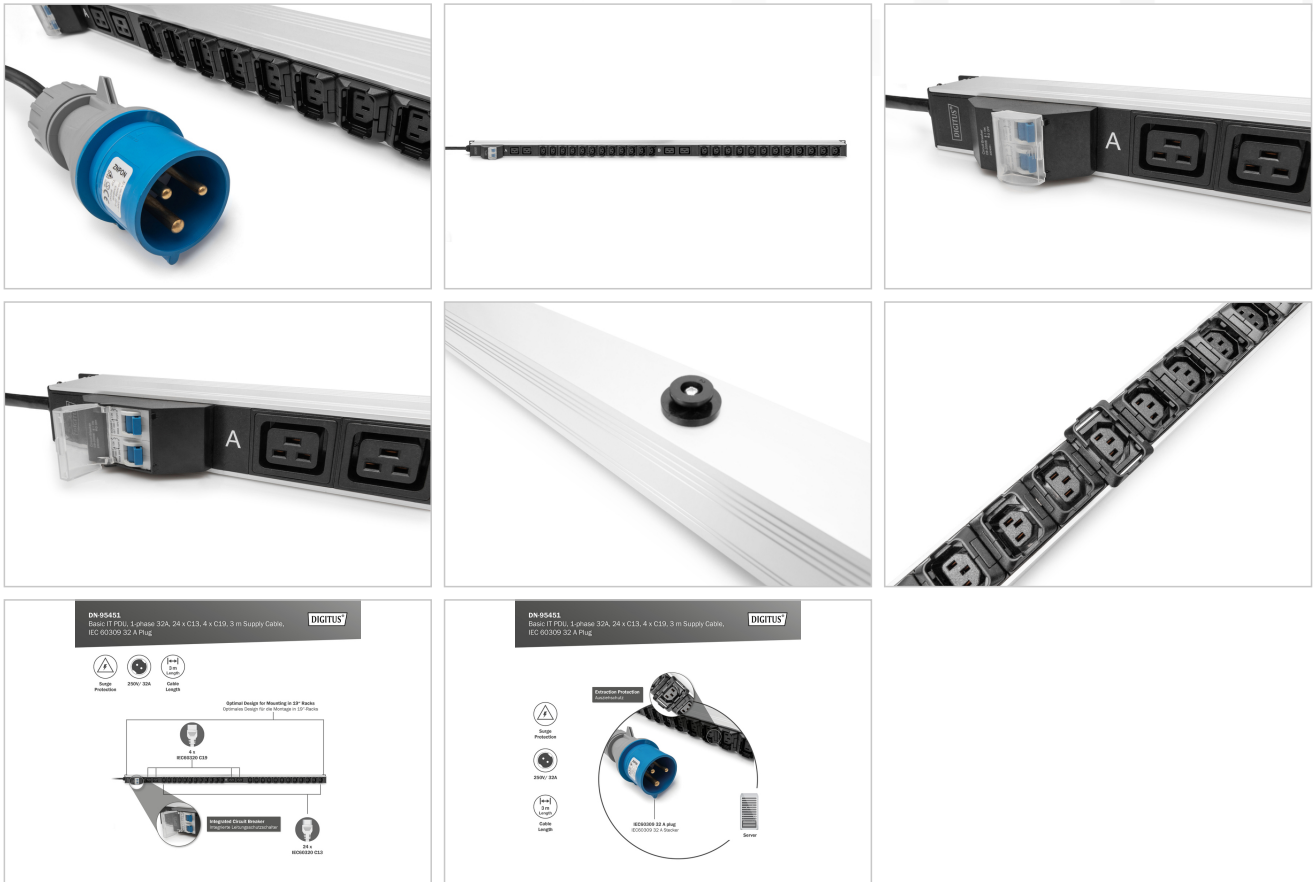

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com