DIGITUS® Mobile charging cabinet for 30 laptops/tablets up to 16 inches, data synchronization, UV-C, USB-A

DN-45005

EAN 4016032486152



Charging trolley, 16", USB-A, UV-C, Data-Synch. 30 charge bases, PDU, fan, 1260 x 824 x 650 mm

The DIGITUS® mobile charging cabinet is the ideal, compact solution for storing and charging your portable devices, such as laptops and tablets. Mobile charging cabinets are often used in public facilities, such as schools, to securely store devices in a central location while charging them at the same time. The cabinet features 3 rows, each with 10 charging slots, every one of which has its own USB port on the front. In addition, devices can be connected to built-in power strips (3 x 10-outlet grounded outlets) at the rear. Thanks to the generous cable grommets and excess cable trays, optimal cable management is guaranteed. Built-in fans (3 x 24 V), in combination with ventilation slots, ensure active cooling of the cabinet. Built-in UV-C lamps ensure a more sterile environment and thus improved hygiene. For centralized data synchronization, a device can be connected to the external USB port.

The ideal solution for sterile storage and charging of your portable devices via USB-A ports. Includes the option for data synchronization.

- UV-C Lamps for Improved Hygiene
- Data Synchronization Capability
- Double-panel front and rear doors
- Pressure-lock system with a swivel-lever handle on the front and rear doors, lockable
- 180° door opening angle
- 2-point locking (bar lock)
- Includes 4 casters (2 of which are lockable)
- Includes handles for easier mobility (included)
- Product dimensions (H x W x D) in mm: 1260 x 824 x 650 mm
- Grounded outlet (AC) with a switch on the side
- C20 connection on the side
- Includes 30 mA residual-current circuit breaker
- The product is delivered fully assembled
- Depth of the inner shelf: 415 mm (fits devices up to 16")
- The rollers can be removed if necessary
- USB-A Port Output: 10W (5V 2.1A) per port; 300W max.
- Temperature Control: Fans start automatically when the internal temperature exceeds 40 °C
- Blue plastic brackets can be removed if necessary

Attributes

- Boja: crna, RAL 9005
- Suitable for display size: 40,6 cm (16")
- Number of Devices: 30
- USB connection (charging): USB A
- Additional connection (charging): Safety outlets
- UV-C disinfection: Da
- Data synchronisation function: Da
- Type: Trolley
- Locking type: mechanical

Package contents


- Mobile Charging Cabinet
- 2 handles (for mounting on the outside), including mounting hardware
- Power cord, 2 m
- User Manual
- 4 keys

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	128.00	69.00	77.00	140.00	743,820.00
Packaging Unit Inside	1	128.00	69.00	77.00	140.00	743,820.00
Packaging Unit Single	1	128.00	69.00	77.00	140.00	743,820.00
Net single without Packaging	1	96.00	65.00	82.40	126.00	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

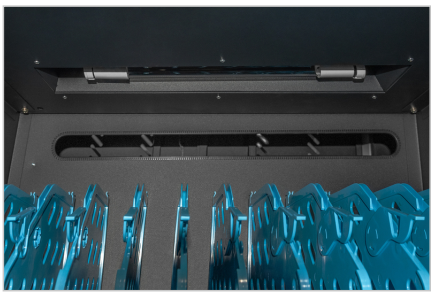









Safety notes

- The product may only be operated on sockets that are protected by a residual current circuit breaker.
- The electrical connection of the product must be made directly to a permanently installed socket.
- The use of multiple sockets or extension cables is not permitted.
- The connection cable must be undamaged. A cable with kinks, crushing or cracks must be replaced immediately.
- Before connecting electrical devices to the product, ensure that the device to be connected, including its connection cable, is in a fault-free and damage-free condition.
- Always insert the plug fully into the socket. It may only be disconnected by pulling on the plug itself - never pull on the cable.
- When operating doors or flaps, care must be taken to ensure that the connecting cables of electrical devices are not crushed or damaged
- Use only in dust and moisture-protected indoor areas
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Avoid moisture, dust or vapors, solvents, flammable gases.
- The appliance may only be dismantled and transported if the mains plug has been disconnected beforehand.
- Only connect the charging system to an earthed and easily accessible socket.
- Safety must be assessed by a qualified electrician.
- The sockets may only be used with the devices intended for this purpose, for example:
- Chargers for rechargeable batteries and hand-held devices
- Smartphones or tablets (mobile devices)
- Laptops / Notebooks / UltraBooks (mobile computers)
- Mobile batteries / PowerBanks
- Please ensure that the maximum total output specified on the rating plate is not exceeded.
- Please also ensure that no liquids enter the electrical equipment of the cabinet.
- Only charge devices under supervision. Long-term storage of any devices with Li-ion batteries is not permitted.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com