


DIGITUS® CAT 6A U/FTP installation cable, 500 m, duplex, Cca

DK-1625-A-VH-D-5
EAN 4016032486787

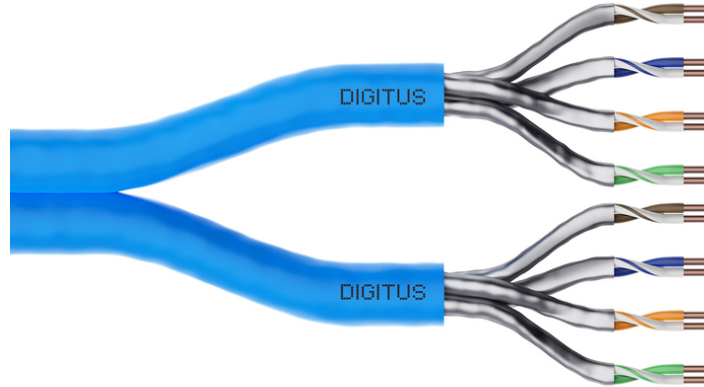

CAT 6A U-FTP installation cable, 500 MHz Cca (EN 50575), AWG 23/1, 500 m drum, dx, blue

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Cca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: None, with drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C


- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @100-500 MHz
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-FTP, parovi u metalnoj foliji
- CPR: Cca
- Duljina: 500 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	52.80	55.00	55.00	38.00	114,950.00
Packaging Unit Inside	1	52.80	57.00	30.00	35.50	60,705.00
Packaging Unit Single	1	52.80	55.00	55.00	38.00	114,950.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

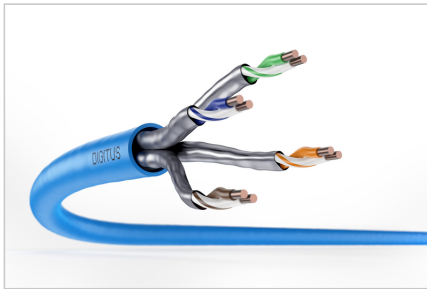

DIGITUS

AWG 23/1

500 MHz Transmitted

10 Gbit Ethernet

CAT 6A

20° ± 75°

LSZH

Eca

CFR class

CAT 6A U/FTP Installation Cable, 500 m, Simplex, E_{ca}

DIGITUS

DK-1823-A-VH-6 // CAT 6, U/FTP Installation Cable, 500m, Simplex, E_{ca}

Anwendungsbispiel
Example of use

DIGITUS

DK-1823-A-VH-6 // CAT 6, U/FTP Installation Cable, 500m, Simplex, E_{ca}

Kabelquerschnitt
Cable cross section

Labels: Außenmantel (Outer jacket), Abschirmung (Shielding), Cu-Draht (Cu-Wire), Adresspaare (Address pairs), Paarverdrillung (Pair twist).

DIGITUS

Produktdaten Product Information

Elektrische Eigenschaften Electrical Properties

Physikalische Spezifikationen Physical Properties

Mechanische Eigenschaften Mechanical Properties

DIGITUS

Leitungsparameter Transmission Properties

FREQ.	ATT	NEXT	PS NEXT	ACR	PS ACR	SL	EXTFEXT	PS EXFEXT
MHz	dB	dB	dB	dB	dB	dB	dB	dB
1	1.1	25	16	6.2	6.3	25	16	16
10	1.3	30	17	6.1	6.2	25	16	16
100	1.6	35	17	6.0	6.0	26	16	16
1000	2.1	45	16	5.9	5.9	13	16	17
10000	3.1	57	13	5.7	5.7	12	14	11

Intertek

ETL Vertical Certificate of Conformance

Model: 1823-A-VH-6

Part Number: 1823-A-VH-6

Quantity: 10000

Lot Number: 1823-A-VH-6

Issue Date: 04/23/2014


GHMT

Certificate No. 1823-A-VH-6

Zertifikat No. 1823-A-VH-6

Category 6

Category 6

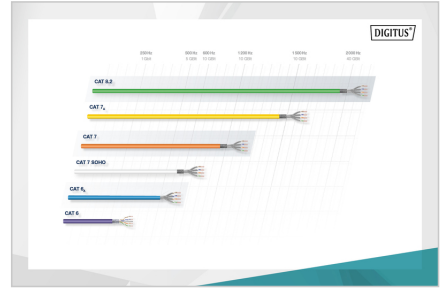

DIGITUS

CFR Compliance


Bestimmungstabelle für die Anwendung

Leitungsparameter (AWG)

Adresspaare (conformity Data)

Zusatzanforderungen

Labels: B2ca, Cca, Dca, Eca, Cca, s1a, d1, a1

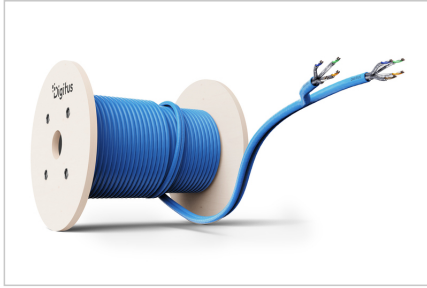

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com