

# DIGITUS® KVM Switch, 2x1 HDMI, HDMI Out,USB, 4Kx2K@60Hz

DS-12874

EAN 4016032487517



### KVM Switch, 2x1 HDMI, HDMI Out,USB, 4Kx2K@60Hz

The DIGITUS® 2-Port KVM Switch is a high-performance HDMI-KVM switcher. It routes high definition video (in multiple resolutions up to 4kx2k@60Hz) and audio from any one of the several sources to display units. This HDMI-KVM switcher not only has the key-press-switching function, but also has intelligent function as well as hot pluggable function.

**Operate 2 PCs with one USB keyboard and mouse – switch between two computers by pressing a button or with the remote control**

- Inputs: 2 xHDMI®, 2 x USB B (3.0), 2 x audio input, 2 x audio output
- Output: 1 x HDMI®, 1 x audio input, 1 x audio output, 2 x USB A 2.0
- Additional connections front side: 2 x USB A 3.0, 1 x audio input, 1 x audio output, infrared receiver, IR output
- Audio inputs/outputs: 3.5 mm stereo jack socket
- LED front side: Power, 2 x Online, 2 x Selection PC
- Switch: Power On/Off, Toggle PC1 / PC2
- HDMI® version: 2.0
- HDCP version: 2.2 / 1.4
- UHD resolution: 4096 x 2160p / 60 Hz
- Subsampling: RGB 4:4:4/ YCbCr 4:4:4/ YCbCr 4:2:2/ YCbCr 4:2:0
- Bandwidth HDMI®: 18 Gbps all channels (6 Gbps per channel), supports HDR
- Color depth HDMI®: 36 bit (all channels)
- Power supply power adapter: 100 - 240 V AC / 50/60 Hz, 0.4 A

- Power supply KVM switch: 5 V / 3 A
- Operating temperature: 0°C ~ 45°C
- Operating humidity: 10% - 85% RH (non-condensing)
- Housing material: Metal
- Installation bracket for wall mounting included
- External receiver for signals from remote control included
- Dimensions: 17.8 x 7.5 x 2.6 cm (WxDxH)
- Weight: 366 g
- Color: Black
- Device Power consumption (Max.): 12W
- DC plug Size: 5.5\*2.5

#### Attributes



- Interface: HDMI
- Number of ports: 2

#### Package contents

- 1 x KVM Switch, 2-Port, 4K60Hz, 2 x HDMI in, 1 x HDMI out
- 1 x Power adapter for KVM switch
- 2 x USB 3.0 connection cable (USB B to USB A)
- 2 x HDMI cable
- 1 x Infrared remote control
- 1 x Infrared recipient with connection cable
- 2 x Mounting bracket for table/wall installation
- 1 x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	12.16	34.00	38.00	52.00	67,184.00
Packaging Unit Inside	1	0.61	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.61	6.50	18.00	23.00	2,691.00
Net single without Packaging	1	0.37	2.60	7.50	17.80	0.00

**More images:**

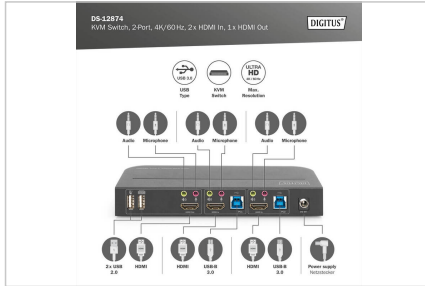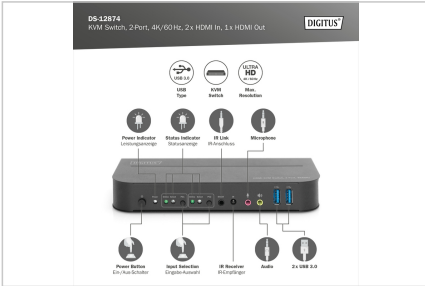

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>

---

info@assmann.com