DIGITUS® 4K HDMI Switch, 5x1

DS-55332

EAN 4016032495536



5x1 HDMI Switch, 4K/60Hz HDCP 2.2

The DIGITUS® 4K HDMI Switch, 5x1 provides additional HDMI ports for your display—allowing you to connect 5 signal sources to the screen via a single HDMI port. The video switcher is powered via a USB-C cable, for example, from the source device or a USB charging adapter. Easily switch between signal sources using the remote control, the device itself, or via automatic detection. Perfect for wall-mounted TVs—only one HDMI cable is needed to connect the sources.

Add additional HDMI ports to your TV or monitor—easily switch between signal sources without having to unplug anything

- Easily switch between 5 signal sources using the remote control, the device itself, or automatic detection
- Additional HDMI ports for your display device—5 signal sources via just 1 HDMI port/cable connected to the screen
- Power supply via USB-C cable (included)
- Max. resolution: 4K/60 Hz
- Video bandwidth: 18 Gbps
- Supports High Dynamic Range (HDR)
- Supports HDCP 2.2
- Supports CEC (Consumer Electronics Control)
- Supports Deep Color (36-bit)
- Supports compressed (e.g., DTS, Dolby Digital, etc.) and uncompressed audio formats (e.g., LPCM, etc.)
- HDMI 2.0
- Connections:
  - 5 HDMI inputs (4K/60 Hz)
  - 1x HDMI output (4K/60 Hz)
  - 1x Micro USB input (DC 5V) - Power supply
  - 8 status LEDs
  - 1x Switch / Function Key
  - 1 IR receiver
  - Operating temperature: 0–70°
  - Power consumption: approx. 5W
  - Housing: Metal
  - Dimensions (housing): L 16.0 x W 6.2 x H 1.4 cm
  - Weight: 205 g
  - Color: black

Attributes

- HDTV-norma: Ultra HD 4K
- rezolucija maks.: 3840 x 2160 piksela, 60 Hz
- Broj izlaznih priključaka: 1
- Broj ulaznih priključaka: 5
- Izlaz signala: HDMI
- Priključci za video vezu: HDMI
- Ulaz signala: HDMI

Package contents


- 1 HDMI Switch
- 1 remote control (requires 2 AAA batteries, not included)
- 1 USB-C cable (1.0 m)
- 1 QIG

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	15.00	39.50	30.50	44.00	53,009.00
Packaging Unit Inside	1	0.38	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.38	17.90	12.30	4.50	990.77
Net single without Packaging	1	0.19	16.00	6.20	1.40	0.00


More images:



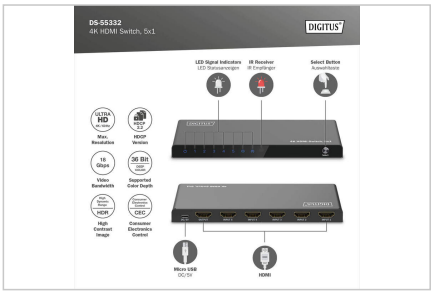



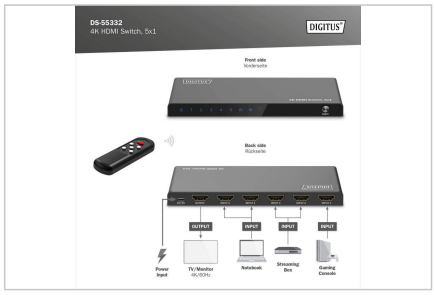

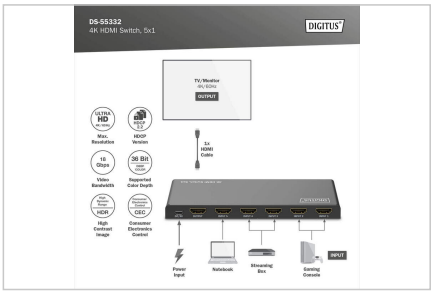







Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany

https://www.assmann.com
info@assmann.com

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.