# DIGITUS® Lightning silicone connection cable, USB-A - Lightning 0.5m, white

**AK-600108-005-W**

**EAN 4016032495871**



**USB Silicone charging cable, USB-A - Lightning 0,5m, USB 2.0, 12W, white**

Reliable and easy connection to your Lightning devices with your PC thanks to the soft and flexible silicone cable. Data transfer rate of 480 Mbits/s for synchronization, data transfer and a power delivery specification of 12W for charging.

**Fast charging and synchronization with the high-quality and soft silicone connection cable**

- Supports data transfer rates of 480 Mbit/s
- Backwards compatible with USB 2.0 and USB 1.1
- Supports the USB power delivery function with 5V, 2.4A and 12W
- Durable cable with a service life of up to 25,000 bends (based on internal tests)
- MFI-certified

**Attributes**

- AWG: 22
- Kabel u boji: bijeli
- Kapice: ukalupljeno
- Konektor 1: Apple Lightning 8-polni, utikač
- Konektor 2: USB A, utikač
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.5 m
- oklop: jednostruki oklop

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 250 | 6.38 | 21.00 | 32.00 | 50.00 | 33,600.00 |
| **Packaging Unit Inside** | 10 | 0.26 | 1.35 | 24.00 | 30.00 | 972.00 |
| **Packaging Unit Single** | 1 | 0.03 | 0.55 | 21.00 | 11.50 | 131.62 |
| **Net single without Packaging** | 1 | 0.02 | 0.50 | 12.00 | 10.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**


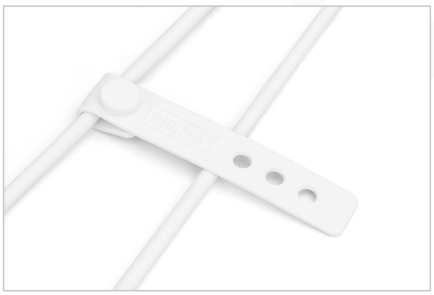
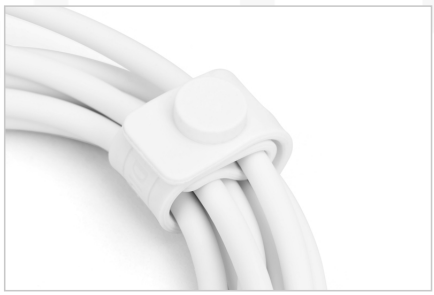







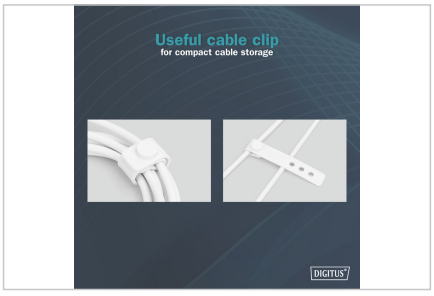

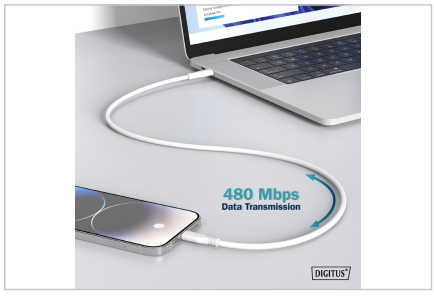




**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com