

# DIGITUS® Lightning silicone connection cable, USB-C - Lightning, 0.5m, black

AK-600110-005-S  
EAN 4016032495949



### USB Silicone charging cable, USB-C - Lightning 0,5m, USB 2.0, 60W, black

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rate of 480 Mbits/s for synchronization, data transfer and a power delivery specification of 60W for charging.

#### Fast charging and synchronization with the high-quality and soft silicone connection cable

- Supports data transfer rates of 480 Mbit/s
- Backwards compatible with USB 2.0 and USB 1.1
- Supports the USB power delivery function with 20V, 3A and 60W
- Durable cable with a service life of up to 25,000 bends (based on internal tests)


- Type C plug can be used on both sides
- MFI-certified

#### Attributes

- AWG: 22
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: Apple Lightning 8-polni, utikač
- Konektor 2: USB C, utikač
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.5 m
- oklop: jednostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	250	6.38	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.26	1.35	24.00	30.00	972.00
Packaging Unit Single	1	0.03	0.55	21.00	11.50	131.62
Net single without Packaging	1	0.02	0.50	12.00	10.00	0.00

**More images:**

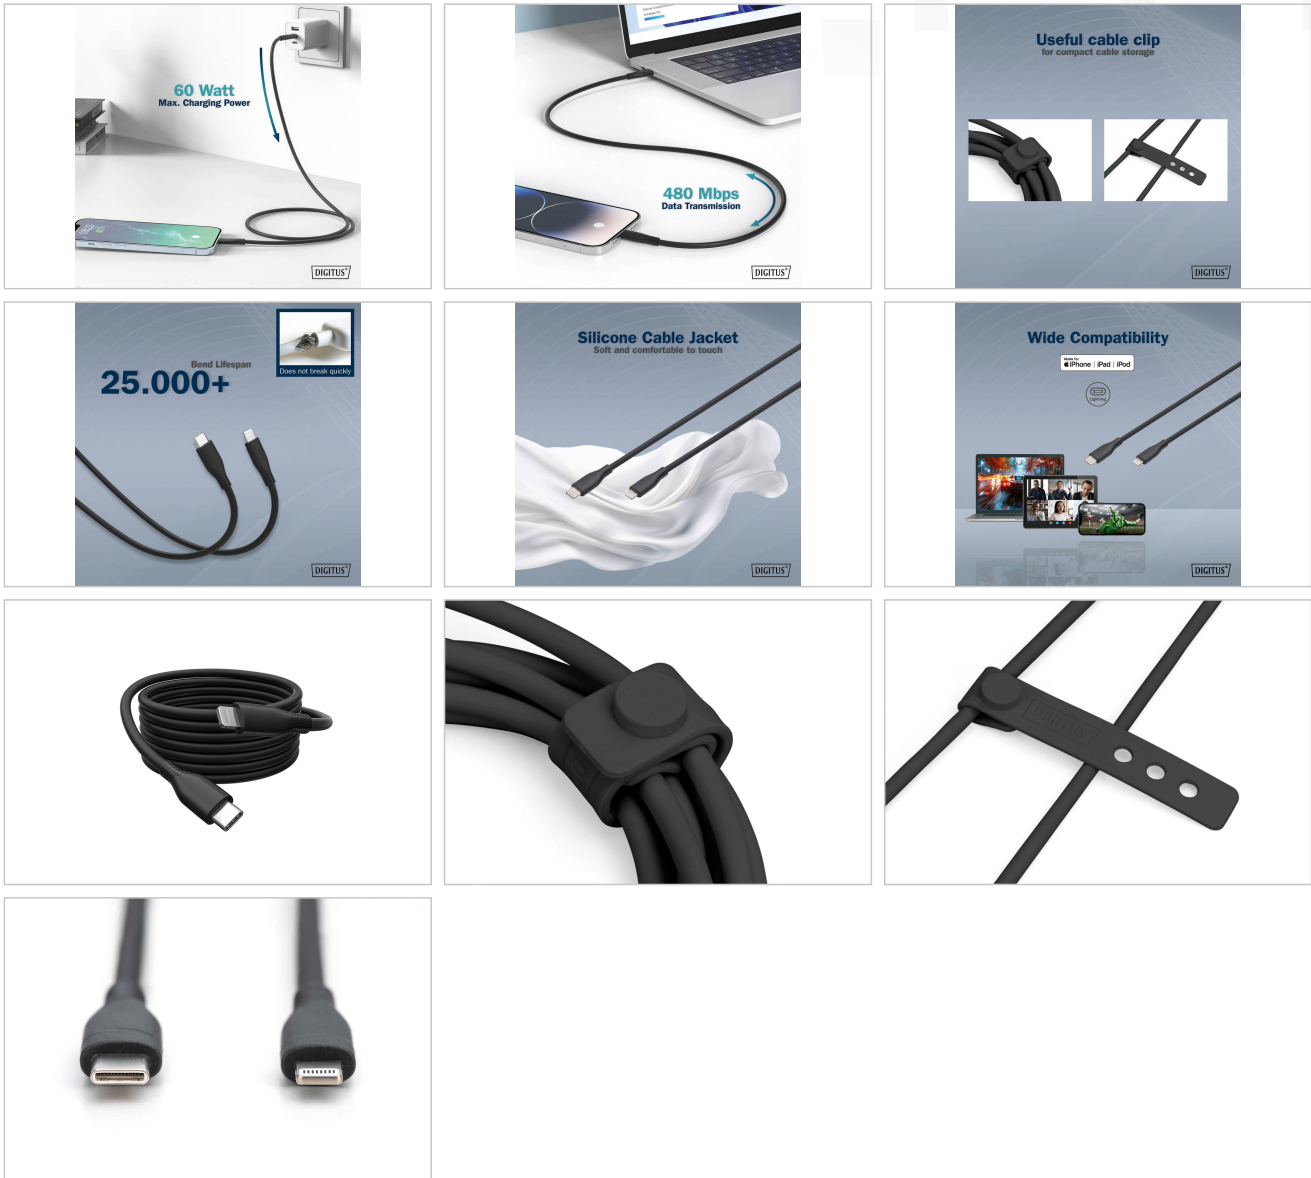

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)