

DIGITUS® Cabo de ligação de silicone Lightning, USB-C - Lightning, 1 m, preto

AK-600110-010-S

EAN 4016032495963



Cabo de carregamento USB de silicone, USB-C - Lightning 1m, USB 2.0, 60W, preto

Ligação fiável e fácil dos seus dispositivos USB-C ao seu PC graças ao cabo de silicone macio e flexível. Taxa de transferência de dados de 480 Mbits/s para sincronização e transferência de dados e uma especificação de fornecimento de energia de 60 W para carregamento.

Carregamento e sincronização rápidos com o cabo de ligação de silicone macio e de alta qualidade

- Suporta taxas de transferência de dados de 480 Mbit/s
- Retrocompatível com USB 2.0 e USB 1.1
- Suporta a função de fornecimento de energia USB com 20V, 3A e 60W
- Cabo durável com uma vida útil de até 25.000 curvas (com base em testes internos)

- A ficha tipo C pode ser utilizada em ambos os lados
- Certificado por IFM


Attributes

- AWG: 22
- Color cable: black
- Connector 1: Apple Lightning 8-pin, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1 m
- Shielding: single shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	7.90	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.40	3.60	24.00	30.00	2,592.00
Packaging Unit Single	1	0.04	1.00	21.00	11.50	240.29
Net single without Packaging	1	0.03	0.90	12.00	10.00	0.00

More images:

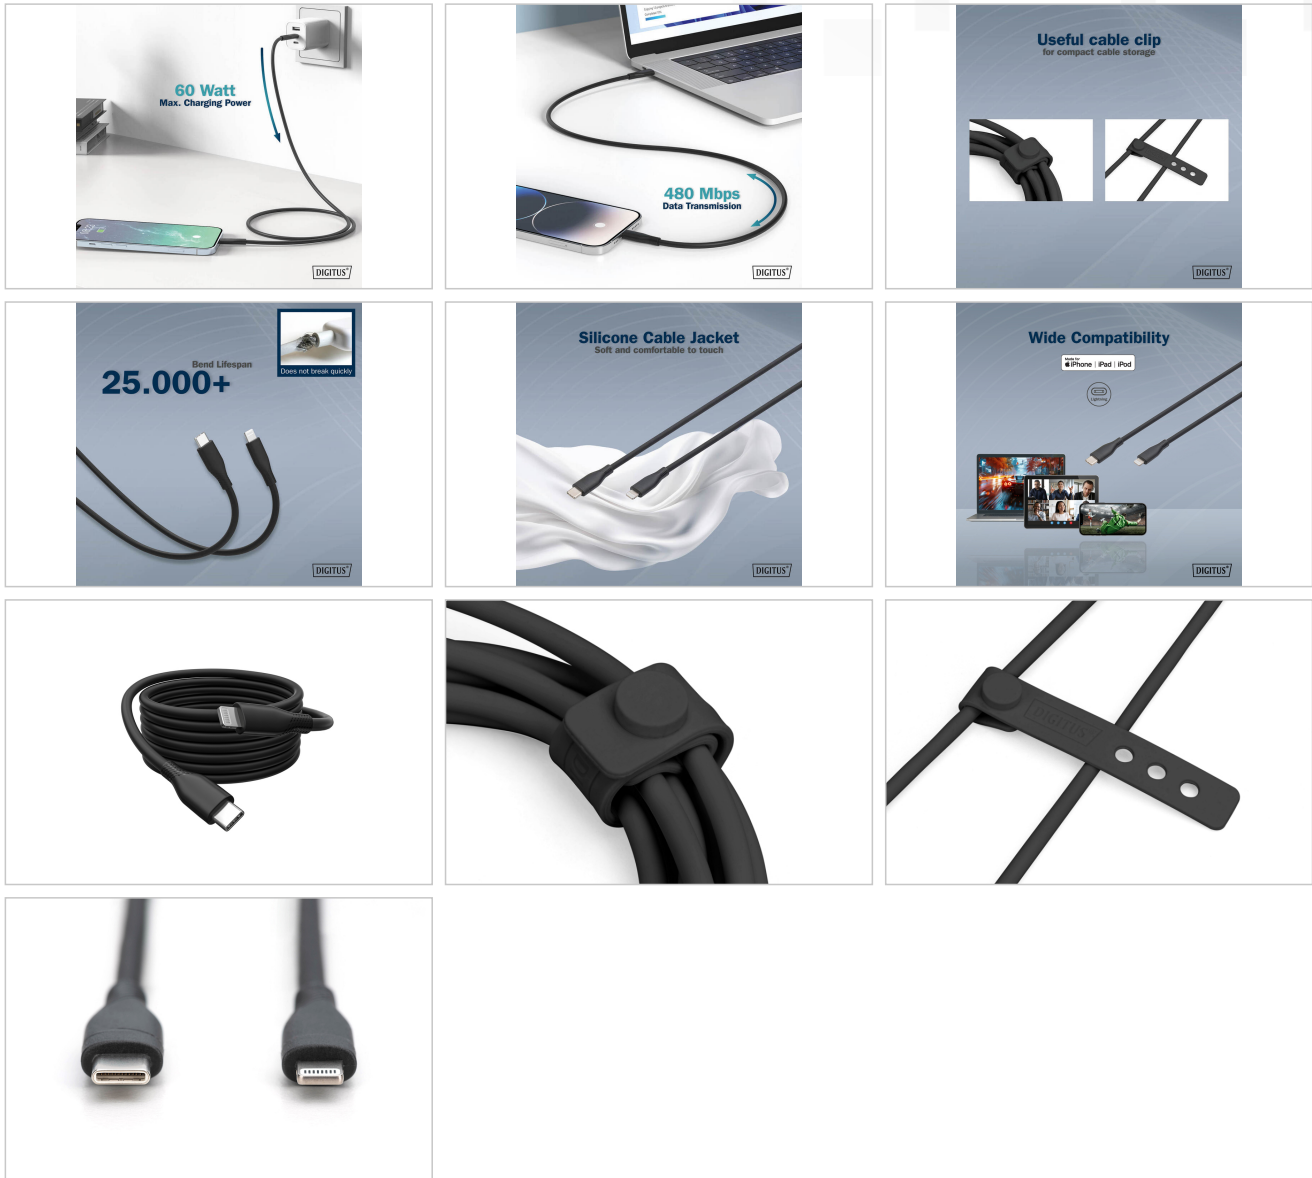

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com