

# DIGITUS® USB silicone cable, USB4 Gen3, 40Gbps, 1m, black

AK-300344-010-S  
EAN 4016032496106



**USB Silicone connection cable, USB-C - USB-C 1m, USB4 Gen3, 40G, 240W, 8K, black**

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rates of 40 Gbits/s for synchronization and data transfer, an 8K screen resolution and a power delivery specification of 240W for charging are possible with this high-quality all-rounder cable.

**Fast charging and synchronization with the high-quality and soft silicone connection cable. 8K video transmission is possible with the USB version USB4 Gen3**

- Supports data transfer rates of 40 Gbps
- Backwards compatible with USB 3.2/USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 48V, 5A and 240W




- Supports 8K (7680x4320) @60Hz and 4K (3840x2160) @120Hz
- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Type C plug can be used on both sides

**Attributes**

- AWG: 30
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 4.0
- Length: 1 m
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	150	6.26	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.42	5.20	35.00	35.00	6,370.00
Packaging Unit Single	1	0.04	1.40	21.00	11.50	336.89
Net single without Packaging	1	0.03	1.30	12.00	10.00	0.00

More images:

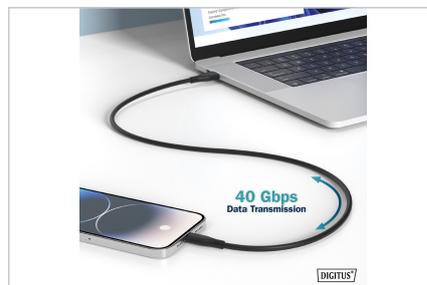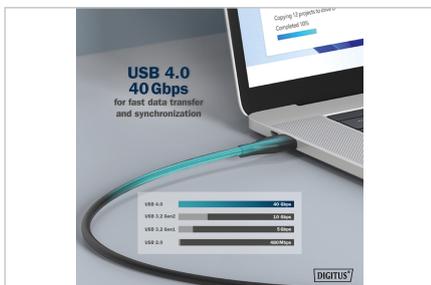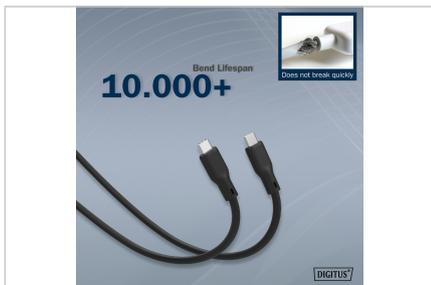

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short

circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)