

DIGITUS® USB silicone cable, USB4 Gen3, 40Gbps, 1m, black

AK-300344-010-S

EAN 4016032496106



USB Silicone connection cable, USB-C – USB-C 1m, USB4 Gen3, 40G, 240W, 8K, black

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rates of 40 Gbits/s for synchronization and data transfer, an 8K screen resolution and a power delivery specification of 240W for charging are possible with this high-quality all-rounder cable.

Fast charging and synchronization with the high-quality and soft silicone connection cable. 8K video transmission is possible with the USB version USB4 Gen3

- Supports data transfer rates of 40 Gbps
- Backwards compatible with USB 3.2/USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 48V, 5A and 240W

- Supports 8K (7680x4320) @60Hz and 4K (3840x2160) @120Hz
- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Type C plug can be used on both sides



Attributes

- AWG: 30
- Feritni filter: nema
- Kabel u boji: crni
- Konektor 1: USB C, utikač
- Konektor 2: USB C, utikač
- Površina konektora: poniklano
- USB sukladnost: USB 4.0
- Duljina: 1 m
- oklop: trostruki oklop

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	150	6.26	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.42	5.20	35.00	35.00	6,370.00
Packaging Unit Single	1	0.04	1.40	21.00	11.50	336.89
Net single without Packaging	1	0.03	1.30	12.00	10.00	0.00

More images:

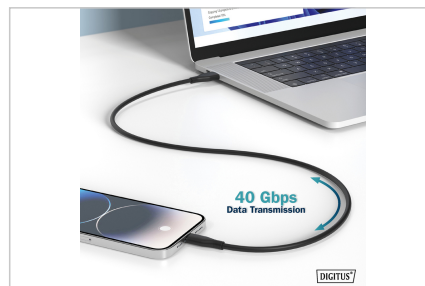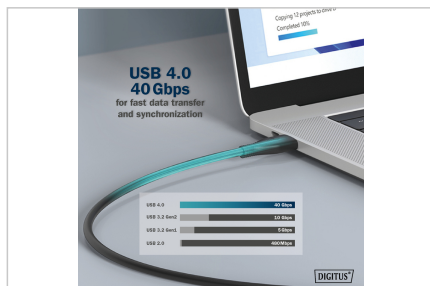

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short

circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com