


DIGITUS Modular plug for round cable, unshielded, 100 pcs.

DN-MO-8-8-SR
EAN 4016032499374

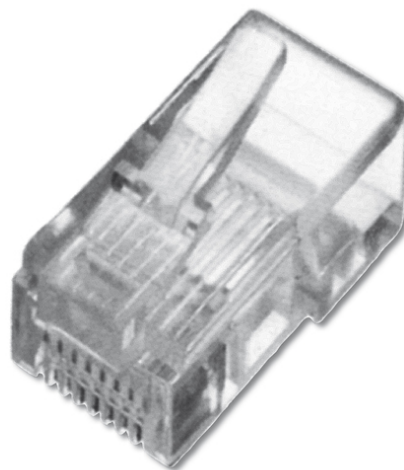

Modular Plug, for stranded Round Cable, 8P8C unshielded, 100 pcs. packr

Modular plug, 8P8C, unshielded for solid conductor round cable two-piece plug

- Performance characteristics: CAT 5e, 10/100Base-T, 1GBase-T
- Areas of application: Patch cable assembly
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL-certified
- Technical features:
- Socket mating cycle: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5

- Material plug housing: polycarbonate, natural
- Plug contact: Phosphor bronze, nickel 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter copper conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Attributes

- Category: CAT 5e

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	16.40	46.50	35.00	30.00	48,825.00
Packaging Unit Inside	1	16.40	0.00	0.00	0.00	0.00
Packaging Unit Single	1	16.40	0.00	0.00	0.00	0.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com