

DIGITUS® SOHO Pro network set, 254 mm (10") - 6U, 315 x 300 mm (W x D)

DN-49100-SET

EAN 4016032499404



10" network bundle, 6U cabinet and equipment, gr SOHO Pro version, unmounted

Whether in the home, office or in sub-distribution boards with limited space: With the compact 254 mm (10") solutions from the SOHO Pro series, you can install your network wherever you want. Installation takes just a few steps and is child's play thanks to the enclosed step-by-step instructions. Available in three versions of height units (6U, 9U, 12U), these network sets include perfectly matched DIGITUS components to ensure quick and easy IT cabling ready for use. The network cabinet and the respective accessories (e.g. switch, patch panel, socket strip, cable management panel, patch cable, etc.) are supplied in a compact cardboard box.

Complete set for setting up a compact 254 mm (10") network, incl. cabinet, shelf, socket strip, switch, patch panel, keystone modules, patch cables.

- Wall-mounted housing dimensions (H x W x D): 325 x 315 x 300 mm (supplied unassembled)
- Multiple socket outlet with 4 socket outlets with earthing contact 250VAC 50/60Hz / 16A / 4000W
- Socket strip with 2 m supply cable H05VV-F 35 1.5 mm² with earthing contact plug
- Switch complies with the IEEE 802.3, IEEE 802.3u, IEEE 802.3ab and IEEE 802.3x network standards

- Keystone module: Category 6A 10GBase-T, 500 MHz, suitable for PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt), GHMT certified
- Patch cable: CAT 6A S-FTP, Cu, LSZH, AWG 26/7, length 0.25 m, color grey

Attributes


- Bočne ploče: Obje strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 300 mm
- Jedinice: 6
- Kapacitet opterećenja: 30 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 315 mm
- Vrsta ormara: Zidni ormarić
- IP klasa zaštite: IP20
- Montirano: Ne

Package contents

- 1 x wall housing, unmounted (incl. 2 x keys)
- 1 x shelf
- 1 x socket strip
- 1 x switch
- 1 x patch panel
- 12 x Keystone module
- 10 x patch cable

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 1 | 10.00 | 41.00 | 37.00 | 38.00 | 57,646.00 |
| Packaging Unit Inside | 1 | 10.00 | 41.00 | 37.00 | 38.00 | 57,646.00 |
| Packaging Unit Single | 1 | 10.00 | 41.00 | 37.00 | 38.00 | 57,646.00 |
| Net single without Packaging | 1 | 7.52 | 30.00 | 31.50 | 32.50 | 0.00 |

More images:

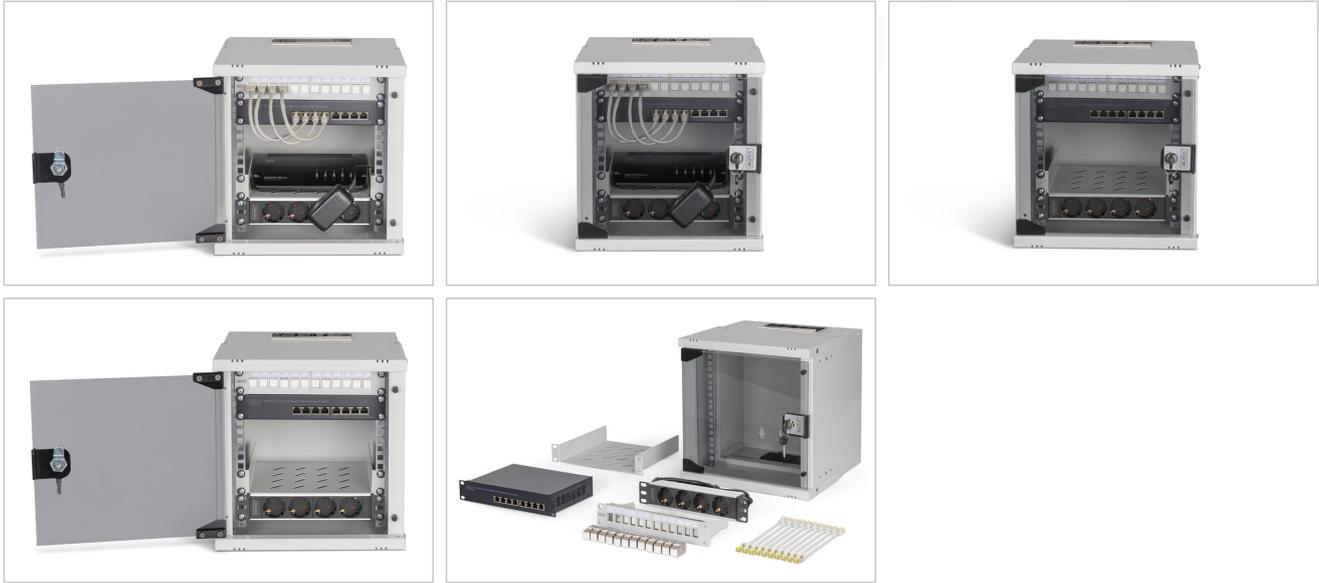

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com