

Digitus® USB-C 2in1 charging cable, 140W, 1.8m

AK-300170-018-S

EAN 4016032505709



USB-C 2in1 Charging Cable, 140W, 1.8m USB 2.0, Nylon-braided, black

The Digitus USB-C 2in1 charging cable combines maximum charging power with clever functionality. With an output power of up to 140W (Power Delivery 3.1), it supplies even power-hungry notebooks such as a MacBook Pro with power reliably and quickly. You can also charge your smartphone or tablet at the same time - all with just one cable. Thanks to the intelligent charging distribution, the cable automatically adapts to the requirements of the connected end devices. This prevents overcharging and protects the service life of your devices. The hard-wearing nylon fabric guarantees a long service life, even with daily use. With a practical length of 1.8m and a cable loop, the cable offers optimum freedom of movement - whether at home, in the office or when traveling. With the Digitus USB-C 2in1 charging cable, tangled cables and charging bottlenecks are a thing of the past. One cable, two devices, maximum efficiency - for all those who expect more.

One cable, two devices, maximum power: the 2in1 USB-C cable delivers up to 140W for laptop and smartphone simultaneously - fast, flexible and always ready for use.

- 1x USB-C plug (host) to 2x USB-C plug (devices)
- Maximum charging power: up to 140W (Power Delivery 3.1) with 48V/5A
- Intelligent power management: Automatic distribution depending on the connected device for optimum, safe charging (power allocation)
- USB 2.0 standard with up to 480 Mbps - for the first connected device
- Cable length: 1.8 meters, including 30 cm to each of the two USB-C plugs
- Includes cable tie/cable loop for neat and tidy storage

- Cable material: PVC cable with robust, braided nylon textile sheath (nylon braid)
- Cable diameter: approx. 4.1 mm (AWG 30)
- Plug material: Nickel-plated
- Housing material: ABS plastic
- Compatibility: Supports Power Delivery-enabled devices such as MacBook, notebook, tablet and smartphone
- Safety functions: Protection against overcharging, overvoltage and short circuit
- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Note on charge distribution: The actual distribution depends on the charger and the connected devices. The values given are examples from tests with specific devices.
- If two devices are charged in parallel, the higher power usually flows to one device, while the second is supplied with approx. 18-24 W. In certain combinations (e.g. two laptops at 20 V), even distribution is also possible.


Attributes

- AWG: 30
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 1.8 m
- Shielding: Double shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	7.80	30.00	44.00	18.00	23,760.00
Packaging Unit Inside	10	0.98	35.00	28.00	2.20	2,156.00
Packaging Unit Single	1	0.10	21.00	11.50	1.10	265.65
Net single without Packaging	1	0.08	11.00	19.00	1.10	0.00

More images:

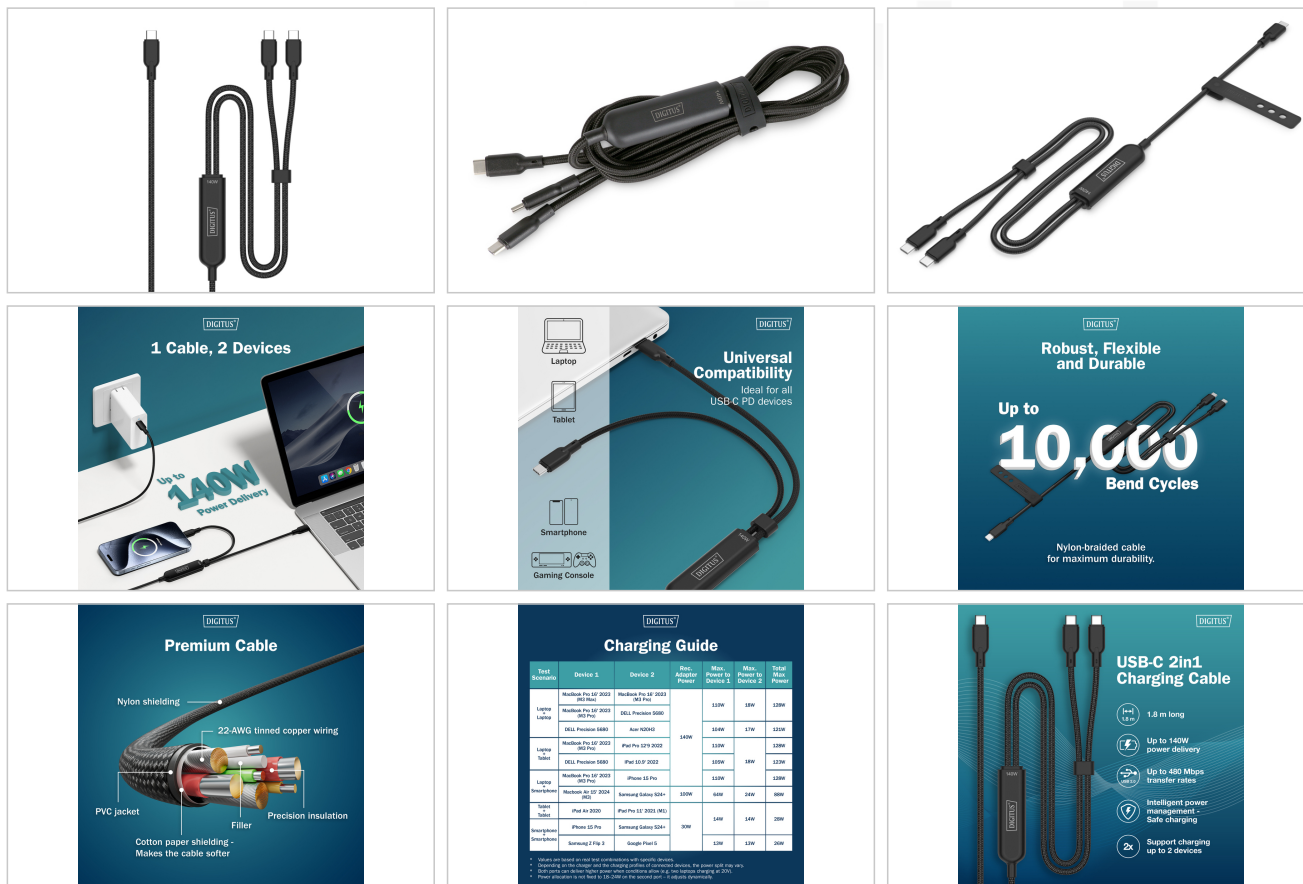

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com