DIGITUS® 45W USB GaN Charger, 1x USB-C, 1x USB-A

DA-10302

EAN 4016032505822



USB GaN Charger, 45W 1x USB-C, 1x USB-A, White

With the DIGITUS USB GaN II Charger 45W, you can charge your devices faster, more safely, and in a more space-saving way than ever before. Thanks to modern GaN II technology (gallium nitride), this charger delivers enough power to reliably charge not only smartphones and tablets, but also lightweight laptops. The high-performance USB-C port provides up to 45 watts, while the USB-A port delivers up to 22.5 watts. This allows you to flexibly connect various devices and even charge two devices at the same time—perfect for everyday use, the office, or on the go. Even when used simultaneously, the intelligent power distribution ensures safe operation at 25 watts (USB-C) and 18 watts (USB-A). The compact design saves space in your bag and makes the charger the ideal companion for any situation. Another highlight: The housing is made of 98% recycled PCR (post-consumer recycled) material, and the packaging is 100% plastic-free—without compromising on quality or durability. With universal compatibility, intelligent power adjustment, and a well-designed safety architecture, this charger is the smart choice for anyone who wants to combine performance and quality in a single device.

The USB GaN II 45W Charger provides enough power to charge smartphones, tablets, and even lightweight laptops quickly and reliably—it's compact, efficient, and perfect for any trip.

- Maximum power per port: USB-C max. 45W, USB-A max. 22.5W
- Multi-Device Charging (2 Ports) USB-C + USB-A: 25W max. + 18W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation, and a compact design
- Plastic housing made from 98% recycled PCR material
- Plastic-Free Packaging
- Protection against overcurrent, short circuits, and overheating
- Input Voltage/Rated Current/Frequency: 100–240 V / 1.3 A / 50/60 Hz
- Average active efficiency: 81.7%
- Power consumption in standby mode: 0.29 W
- Product Color: White
- Dimensions: 3.5 x 8.9 x 3.4 cm
- Weight: 89.5 g

Attributes

- Style: Charger/Power supply

Package contents

- USB charger
- User Manual


Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	6.00	32.00	44.00	25.00	35,200.00
Packaging Unit Inside	20	3.00	20.00	30.00	23.00	13,800.00
Packaging Unit Single	1	0.15	9.00	16.50	3.80	564.30
Net single without Packaging	1	0.90	8.90	3.40	3.50	0.00

More images:





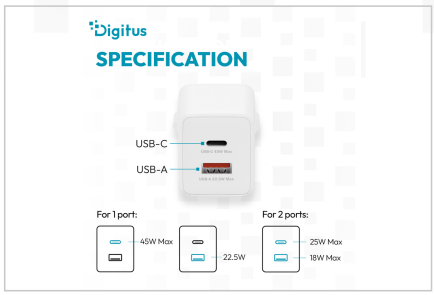











Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com