DIGITUS® 67W USB GaN Charger, 2x USB-C, 1x USB-A

DA-10303

EAN 4016032505839



USB GaN Charger, 67W 2x USB-C, 1x USB-A, White

Pure power, cleverly packaged: With our 67-watt GaN II charger, you can charge your smartphone, tablet, and laptop in a flash—and safely—all with just one compact charger. Two USB-C ports each deliver up to 67 watts, and the USB-A port delivers up to 22.5 watts—perfect for powering multiple devices simultaneously at full capacity. Whether used individually or together: Intelligent power distribution ensures your devices are always charged optimally. Thanks to modern GaN II technology (gallium nitride), the charger is exceptionally efficient, compact, and durable. The housing, made from 98% recycled PCR (post-consumer recycled) material, and the 100% plastic-free packaging offer no compromises in quality or safety. Universally compatible with smartphones, tablets, laptops, and more—your new all-around solution for fast and safe charging.

Powerful, compact, smart: The USB GaN II 67W Charger offers high-speed charging for smartphones, tablets, and laptops—up to 3 devices at once.

- Maximum power per port: USB-C1 max. 67W, USB-C2 max. 67W, USB-A max. 22.5W
- Multi-Device Charging (2 Ports) USB-C1 + USB-C2: 45W max. + 20W max.
- Multi-Device Charging (2 Ports) USB-C1 + USB-A: 45 W + 18 W max.
- Multi-Device Charging (2 Ports) USB-C2 + USB-A: 10 W + 10 W max.
- Multi-Device Charging (3 Ports) USB-C1 + USB-C2 + USB-A: 40W + 10W + 10W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation, and a compact design
- Plastic housing made from 98% recycled PCR material
- Plastic-Free Packaging
- Protection against overcurrent, short circuits, and overheating
- Input Voltage/Rated Current/Frequency: 110–240 V / 2.0 A / 50/60 Hz
- Average active efficiency: 82.9%
- Power consumption in standby mode: 0.27 W
- Product Color: White
- Dimensions: 3.15 x 10 x 3.6 cm
- Weight: 116 g

Attributes

- Tip: Notebook
- Vrsta: Punjač/napajanje

Package contents

- USB charger
- User Manual

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	7.37	35.00	40.00	24.00	33,600.00
Packaging Unit Inside	20	3.69	16.50	37.50	22.00	13,612.50
Packaging Unit Single	1	0.18	9.30	16.50	4.20	644.49
Net single without Packaging	1	0.11	10.00	3.60	3.10	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:





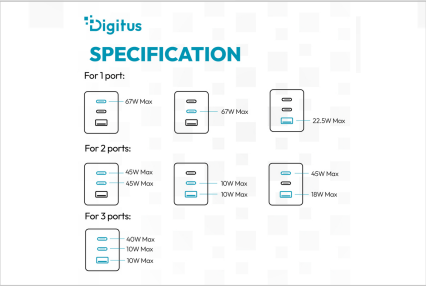











Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com