

DIGITUS® USB GaN Charger 100W, 2x USB-C, 1x USB-A

DA-10304

EAN 4016032505846



USB GaN Charger, 100W 2x USB-C, 1x USB-A, White

With our 100 Watt GaN II Charger, you can charge your devices faster, safer and more efficiently than ever before. The advanced GaN II technology (Gallium Nitride) delivers maximum power for smartphones, tablets and even powerful laptops - all with just one compact USB charger. Two USB-C ports with up to 100 watts each and one USB-A port with up to 22.5 watts offer full flexibility. Whether used individually or in parallel: The intelligent power distribution ensures optimum performance - for example 70 W + 30 W via USB-C1 and USB-C2 or 70 W + 18 W with USB-C1 and USB-A. Even when fully loaded, your devices are supplied reliably and safely. Thanks to the random safety functions such as overcurrent, overvoltage and temperature protection, you can enjoy worry-free charging. The housing consists of up to 30% recycled PCR material (post consumer recycling) and the packaging is 100% plastic-free - a real plus for the environment, without compromising on quality and durability. Universally applicable for smartphones, tablets, notebooks and many other USB devices - the 100 W GaN II Charger is the smart solution for anyone who wants maximum power, clever technology and sustainability in one device.

Power meets lightness: The powerful 100W USB charger combines strong performance with a slim design - ideal for fast charging of laptops, smartphones and more, at home and on the go.

- Maximum power for single connection: USB-C1 max. 100W, USB-C2 max. 100W, USB-A max. 22.5W

- Multi-device charging (2 port) USB-C1 + USB-C2: 70 W max. + 30W max.
- Multi-device charging (2 port) USB-C1 + USB-A: 70W + 18 W max.
- Multi-device charging (2 port) USB-C2 + USB-A: 12 W + 12 W max.
- Multi-device charging (3 port) USB-C1 + USB-C2 + USB-A: 70W + 12W + 12W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation and compact design
- Plastic housing made from 30% recycled PCR material
- Plastic-free packaging
- Protection against overcurrent, short circuits and overheating
- Input voltage/rated current/frequency: 100-240V / 2.0A / 50/60Hz
- Average active efficiency: 85.77 %
- Power consumption in standby: 0.29W
- Product color: White
- Dimensions: 4.6 x 9.27 x 4.0 cm
- Weight: 184 g

Attributes


- Style: Charger/Power supply
- Type: Notebook

Package contents

- USB charger
- Operating instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	40	10.34	34.50	39.00	27.00	36,328.50
Packaging Unit Inside	20	5.17	25.00	37.00	16.50	15,262.50
Packaging Unit Single	1	0.26	9.30	1.65	4.60	70.59
Net single without Packaging	1	0.17	4.10	4.10	4.70	0.00

More images:

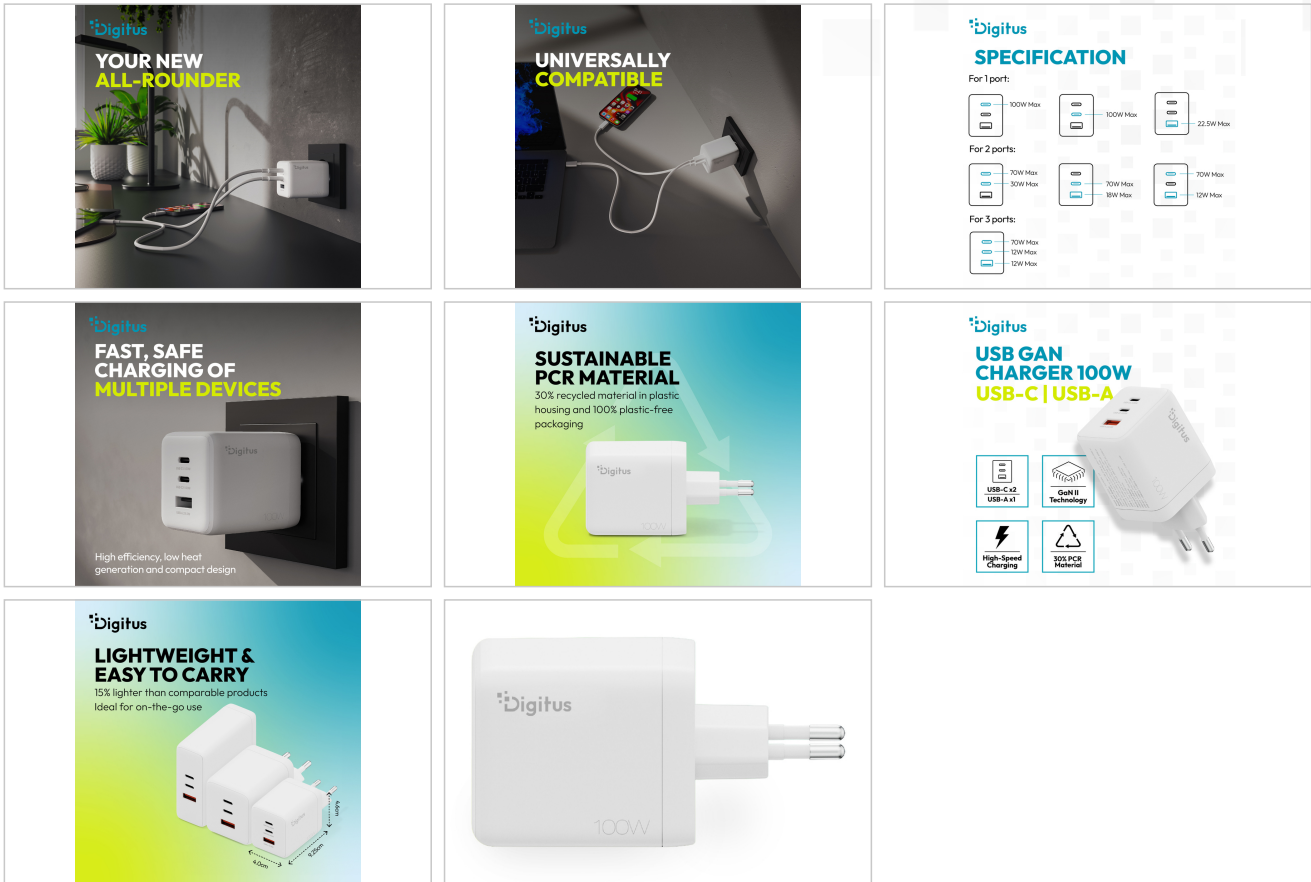

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com