

DIGITUS® USB-C 3.0 HDMI KVM switch, 2-port, 4K60Hz, Core Line

DS-12855

EAN 4016032506560



KVM Switch, 2x1 HDMI, 4K@60Hz 3x USB3.0, 1x USB C, Core Line

The DIGITUS® USB-C 3.0 HDMI KVM switch from the Core Line enables convenient control of two HDMI™-enabled devices with just one mouse, one keyboard and a single monitor. With support for resolutions up to 4K@60Hz (YUV 4:4:4), HDCP and HDR, the switch delivers brilliant image quality for demanding applications. Desktop PCs as well as laptops or even games consoles can be connected effortlessly via HDMI™ and USB-C 3.0 inputs. In addition, three USB-A 3.0 ports and one USB-C 3.0 port are available for sharing peripherals such as external hard disks or USB sticks - with transfer rates of up to 5 Gbps. For operation with high-performance USB drives or SSDs, the use of an external 5V 2A power supply (not included) is recommended. Switching between the connected devices can be done either directly via the button on the device or via the included wired remote control with magnetic base for flexible placement. An integrated 3.5 mm audio output rounds off the features. Power is supplied via USB-C 3.0 - an optional 5V/2A power adapter (not included) is recommended for powerful peripherals.

Switch seamlessly between two devices without having to reconnect - 4K@60Hz, USB 3.0, audio and compact design ensure efficient working and a tidy desk environment.

- Connections - Inputs: 2x HDMI™ input (for two devices) 2x USB-C 3.0 input (for data/control)
- Connections - outputs: 1x HDMI™ output (single display) 3x USB-A 3.0 (up to 5 Gbps) 1x USB-C 3.0 (up to 5 Gbps) 1x 3.5 mm audio output (stereo)

- Resolution: Up to 4K@60Hz (YUV 4:4:4)
- HDR support for vivid colors
- 3D support for compatible content
- HDCP 1.4 / 2.2 for protected content
- Video bandwidth: Up to 6.0 Gbps per channel / 18 Gbps total
- Stereo output via 3.5 mm jack, supported formats: LPCM, DTS, Dolby Digital, TrueHD
- Switching via button on the device
- Switching via wired remote control (1.5 m) with magnetic base
- Power supply: Via USB-C (DC 5V), optional: 5V/2A power supply unit for power-hungry USB devices
- Housing & dimensions: Material: aluminum housing for stability and cooling, dimensions: 135 x 60 x 30 mm, weight: 227 g

Attributes


- Broj priključaka: 2
- Sučelje: HDMI

Package contents

- 1x USB-C 3.0 Dual HDMI™ KVM Switch, 2-port
- 2x USB-A to USB-C 3.0 data cable (1.5 m)
- 1x USB-A to USB-C power cable (1 m)
- 1x remote control with magnetic base (1.5 m)
- 1x quick start guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	10.10	36.60	25.00	23.30	21,319.50
Packaging Unit Inside	1	0.51	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.51	19.00	15.30	7.80	2,267.46
Net single without Packaging	1	0.15	13.60	6.00	1.70	0.00

More images:

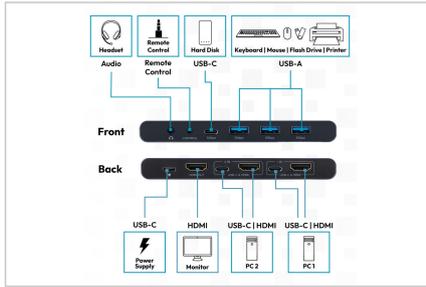

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com