

DIGITUS® USB silicone cable, USB4 version 2.0, USB 80Gbps, 1m, black

AK-300350-010-S
EAN 4016032507901



USB Silicone connection cable, USB-C - USB-C 1m, USB4 Version 2.0, 80G, 240W,16K, black

This latest generation USB-C silicone cable supports transfer rates of up to 80Gbps and enables the playback of content in up to 16K @ 60Hz as well as fast charging with up to 240W (PD 3.1). It combines maximum bandwidth, high charging performance and stable video transmission in one cable. The silicone sheathing ensures exceptional flexibility and a soft-touch feel - unlike braided or rigid cables, it remains soft and kink-resistant even at low temperatures. Ideal for everyday use with high-end docking stations, 16K monitors, gaming laptops and workstations.

High-performance USB-C silicone cable of the latest generation (USB4 version 2.0) with up to 80Gbps, 16K video resolution and 240W Power Delivery. Extremely flexible thanks to soft-touch silicone - ideal for high-end applications.

- Data transfer rate up to 80Gbps (USB4 version 2.0)

- Backwards compatible with USB 4.0 Gen1/Gen2, USB 3.2/USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Video resolution up to 16K (15360x8640) @ 60 Hz or 2 x 8K (7680x4320) multistream
- Power Delivery 3.1 to 240W (48V / 5A)
- Silicone coating: ultra-soft, flexible and temperature-resistant
- Durable cable with a service life of up to 10,000 bends (based on internal tests)

Attributes

- AWG: 30
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 4.0
- Length: 1 m
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	150	6.26	21.00	32.00	50.00	33,600.00
Packaging Unit Inside	10	0.42	5.20	35.00	35.00	6,370.00
Packaging Unit Single	1	0.04	1.40	21.00	11.50	336.89
Net single without Packaging	1	0.03	1.30	12.00	10.00	0.00

More images:

Digitus
SUPERIOR SIGNAL PERFORMANCE
Built for long-distance and high-speed data with minimal interference

- Tinned Copper
- Silver-plated Copper
- Teflon Insulation
- Metal Shielding
- Copper Foil Shield
- Hot-melt Mylar Tape
- Binding Tape
- Metal Braid Shield

Digitus
PRECISION MEETS POWER
Built for ultimate performance in high-end setups

Digitus
USB4 VERSION 2.0
Supports transfer rates of up to 80 Gbps
Up to 10x faster than USB 5.2 Gen1

USB4 Version 2.0	80 Gbps
USB4	40 Gbps
USB4 Gen 2	20 Gbps
USB 3.2 Gen 2	10 Gbps
USB 3.2 Gen 1	5 Gbps
USB 2.0	480 Mbps

Digitus
FULL-FEATURED CABLE
Combining audio/video signals, data transfer, and fast charging

- 240W Power
- 80 Gbps Data
- 10K Video
- Audio/Video

Digitus
USB-C SILICONE CABLE
80Gbps 1M

- ULTRA HD 16K / 60Hz
- 240 Watt Charging Power
- 1m Cable Length
- 80 Gbps Transmission Speed

Digitus
ULTRA DURABLE & FLEXIBLE SILICONE CABLE
Up to 25x more durable than standard cables

Bend Lifespan 10,000+


Digitus
ONE CABLE FOR ALL HIGH-END SCENARIOS
From Full HD to 16K - uncompromised video performance

- Full HD 240Hz
- 4K 240Hz
- 8K 120Hz
- 16K 60Hz

Digitus
NEXT-LEVEL DATA TRANSFER SPEED
Transfer 100 GB in seconds

Digitus
240W HIGH-POWER CHARGING
Even for high-performance notebooks

PD 31 (65W)	240W
PD 3.0 (200W)	100W
PD 3.0 (100W)	67W

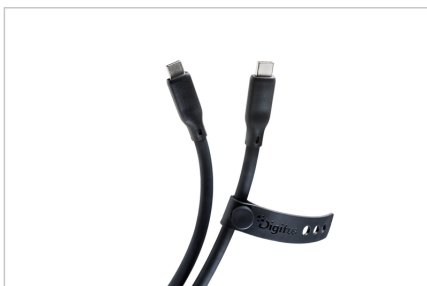

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short

circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com