# DIGITUS® 10" power strip with aluminum profile, 4-outlet grounded power strip, with switch

**DN-95418-S**

**EAN 4016032508359**



**1U Aluminum PDU, 254 mm (10") rack mount, 4x safety outlet, Switch,16A,4000W, 250VAC 50/60Hz**

DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, networking, laboratories, and even home use. The power strip can be mounted in the cabinet in a space-saving 1U configuration within the 10" range. Depending on the cabinet type, the power strip can be mounted with the outlets facing either to the right or to the left.

**Reliable and Professional Power Supply in the 10" Range**

- Horizontal 10" Rack Mount Installation
- Output: 4 x DIN 49440 grounded outlets, max. 16 A per output
- Illuminated switch—protected against accidental deactivation
- Switch with built-in overload protection
- Input: CEE 7/7 grounded plug, 230–250 VAC / 16 A
- Power cord: Cable cross-section: 1.5 mm², Length: 2 m
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Dimensions: 254 mm (10") x 45 (1U) x 45 mm (H x W x D)

**Attributes**

- Additional Features: Power switch, Overload protection
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")

**Package contents**

- 1 x 10" power strip, 4-outlet grounded power strip, with switch
- 2 angle brackets for cabinet installation


**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 10 | 7.05 | 31.50 | 20.50 | 32.00 | 20,664.00 |
| **Packaging Unit Inside** | 1 | 0.71 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 0.71 | 5.80 | 9.70 | 30.50 | 1,715.93 |
| **Net single without Packaging** | 1 | 0.60 | 4.50 | 4.50 | 25.40 | 0.00 |

**More images:**





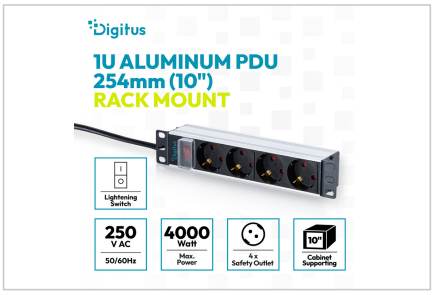












**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com