# DIGITUS® CAT 6 U/UTP Outdoor Patch Cables, 2 m, PE, 10 pieces

**DK-1617-020-OD-10**

**EAN 4016032508533**




**CAT 6 U-UTP outdoor patch cord, Cu, PE, 10 pcs. AWG 26/7, length 2 m, black sheath color**

DIGITUS® Category 6 Class E patch cables are manufactured and tested in accordance with the ISO/IEC 11801 and DIN EN 50173 CAT 6 standards. They ensure that the cable installation complies with the ISO & EN channel specifications and deliver outstanding performance in DIGITUS® CAT 6 cabling. Performance has been tested up to 250 MHz, including performance characteristics such as near-end crosstalk (NEXT). DIGITUS® patch cords have been specially developed to fully meet all requirements across various application areas. Each cable is equipped with an injection-molded kink-protection sleeve with strain relief. Additionally, the sleeve features a latch protection mechanism that prevents the cable from getting snagged and the latch from breaking off the connector. With its UV-resistant PE outer jacket, this outdoor patch cable enables safe installation in areas subject to extreme temperature fluctuations and exposure to sunlight.

**Outstanding performance and connection quality for your network, with UV resistance.**

- 2 RJ45 connectors (8P8C)
- Covers with kink protection, strain relief, and latch protection
- Length markings on the hoods
- Inner conductor: Copper (Cu)
- UV-resistant, acid-, alkali-, and corrosion-resistant
- Operating temperature range: -20 °C to +60 °C
- 10 pieces

**Attributes**


- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: U-UTP, neoklopljeno
- Duljina: 2 m
- Boja: crni
- Kapica: PE
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne


**Logistics**


| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 10 | 6.13 | 36.00 | 36.00 | 27.00 | 34,992.00 |
| **Packaging Unit Inside** | 1 | 0.61 | 12.00 | 30.00 | 36.00 | 12,960.00 |
| **Packaging Unit Single** | 1 | 0.61 | 1.60 | 17.00 | 27.00 | 734.40 |
| **Net single without Packaging** | 1 | 0.07 | 200.00 | 1.20 | 1.30 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

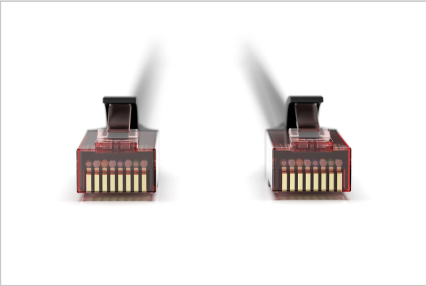

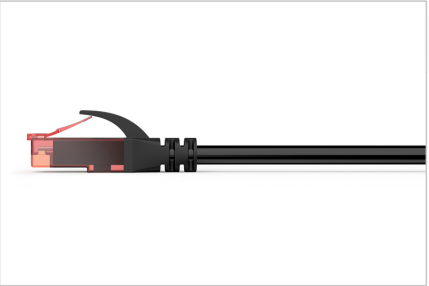

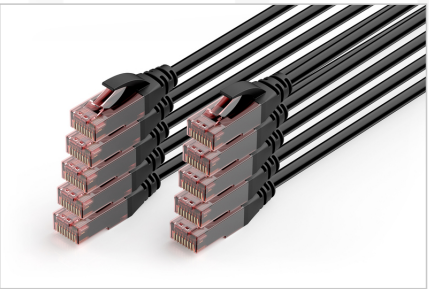

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.