

# DIGITUS® USB-C Docking Station, 8-Port

DA-70921

EAN 4016032510147



## USB-C Docking Station, 8-Port 1x HDMI, 5x USB 3.2 Gen 1, 1x RJ45, 1x PD

Boost your productivity with a compact and powerful docking solution for everyday use: The HDMI port (4K/60Hz) lets you easily expand your workspace with an additional monitor—for a clearer overview and more efficient work. With common operating systems, including macOS, you can flexibly extend or mirror the display to an external monitor. Four USB-A 3.2 Gen 1 ports and one USB-C 3.2 Gen 1 port (5 Gbit/s each) offer fast data transfers and versatile connectivity options for your peripherals. The USB-C Power Delivery 3.0 port reliably charges your laptop while simultaneously powering other devices. The integrated Gigabit Ethernet port (RJ45) ensures a stable and fast network connection. The permanently integrated USB-C cable (18 cm) ensures a direct and flexible connection to the host PC and can be stowed inside the housing to save space when needed. Thanks to support for DP 1.4 Alt Mode (backward compatible with DP 1.2), high image quality is guaranteed. The robust aluminum housing rounds out the package and ensures durability and high-quality craftsmanship.

### Crystal-clear 4K quality with fast USB ports—well-equipped for any application

- Connections:
- 1x USB-C (3.2 Gen 2) input - connection to host PC
- 1x HDMI (2.0) output - Max. resolution: UHD 4K/60Hz
- 4x USB-A 3.2 Gen 1 ports (5 Gbit/s) for fast data transfer & charging: 4x 4.5W (5V/0.9A)
- 1x USB-C 3.2 Gen 1 port (5 Gbit/s) for fast data transfer and charging: 1x 10W (5V/2A)
- 1x RJ45 Gigabit Ethernet - 10/100/1000 Mbit/s bandwidth with MAC address passthrough
- 1x USB-C Power Delivery - 100 watts max. (85W host, 15W dock)
- Chipset Information: CS5366, GL3510, RTL8153E
- Supports DP 1.4 Alt Mode; backward compatible with DP 1.2 Alt Mode (DisplayPort Alternate Mode)
- Supports HDCP 1.4, HDCP 1.3
- Product Color: Gray
- Housing: Aluminum

- Weight: 71.6 g
- Dimensions: L 13.7 x W 4.6 x H 1.3 cm
- Operating temperature: 0°C – +45°C
- Cable length: 18 cm
- Cable color: Light gray
- Notes:
- Extend/Mirror Screen: With common operating systems, including macOS, you can both extend and mirror your screen to an external monitor
- Not all USB-C ports support all features of the USB-C standard. Make sure your laptop's USB-C port supports DisplayPort Alternate Mode (DP-Alt Mode) and USB Power Delivery (PD).
- Video output capability (actual resolution) depends on your laptop's graphics card, the connected monitor, and the DP mode.
- To take full advantage of all features, the laptop must support DP 1.4 Alt Mode
- It is compatible with the following operating systems up to their current versions: Windows 7 and later, macOS 12 and later, iPhone 15 (iOS) and later, iPadOS 16 and later, Android 14 and later, ChromeOS 116.0.5845.120 and later

### Attributes

- Housing: Aluminum
- LAN connector (RJ45): yes
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- USB-C Power Delivery: 100W
- Card reader: no
- Number of display ports: 1
- Number of network ports: 1
- Number of USB A ports: 4
- Number of USB-C ports: 2
- Number of video ports: 1
- Video connection ports: HDMI






### Package contents

- 1 USB-C Docking Station, 8-Port
- 1 QIG

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 100          | 14.00       | 59.00      | 36.00      | 24.00       | 50,976.00       |
| Packaging Unit Inside        | 1            | 0.14        | 0.00       | 0.00       | 0.00        | 0.00            |
| Packaging Unit Single        | 1            | 0.14        | 19.20      | 11.00      | 2.30        | 485.76          |
| Net single without Packaging | 1            | 0.07        | 12.90      | 4.90       | 1.00        | 0.00            |

## More images:

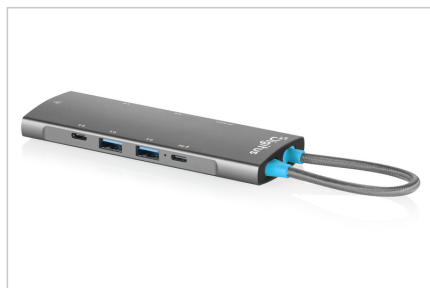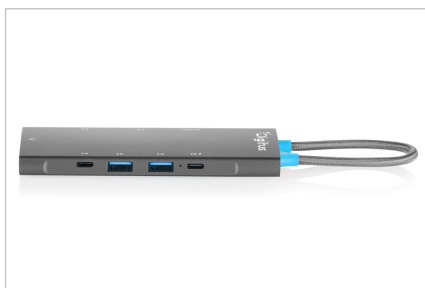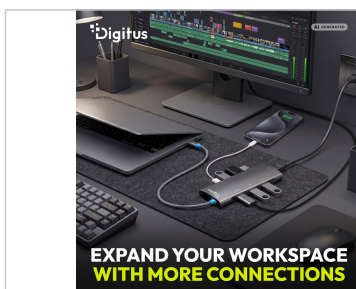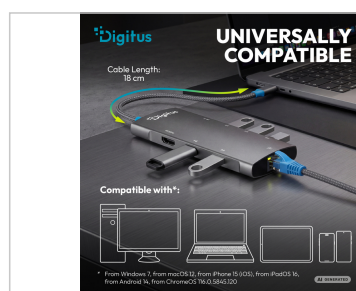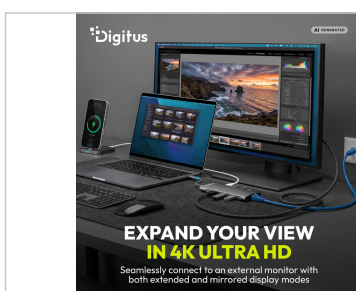

## Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.

- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)