

DIGITUS® USB-C docking station, 8-port

DA-70920

EAN 4016032510161



USB-C Docking Station, 8-Port 1x HDMI, 3x USB 3.2 Gen 1, 2x USB 2.0, 1x PD

Your compact and powerful solution for more productivity in everyday life: With an HDMI port (4K/60Hz), you can easily expand your workstation with an additional external monitor and thus create a better overview and efficiency. With common operating systems, including macOS, the display can be flexibly extended to an external monitor or mirrored. Two USB-A 3.2 Gen 1 ports and one USB-C 3.2 Gen 1 port (5 Gbit/s each) enable fast data transfers, while three USB-A 2.0 ports (480 Mbit/s) are ideal for connecting a mouse, keyboard and other peripherals. Your notebook and connected devices can be reliably charged via the USB-C Power Delivery 3.0 port. The integrated USB-C connection cable (18 cm) ensures a flexible and direct connection to the host PC and can be stowed away in the housing to save space if required. The docking station supports DP 1.4 Alt Mode and is backwards compatible with DP 1.2 Alt Mode (DisplayPort Alternate Mode). The overall package is rounded off by a robust and durable aluminum housing, which ensures stability and a high-quality appearance.

Your all-rounder for compact workspaces - enjoy brilliant 4K quality and many USB connection options

- Connections:
- 1x USB-C (3.2 Gen 2) input - Host PC connection
- 1x HDMI (2.0) output - Max. Resolution: UHD 4K/60Hz
- 2x USB-A 3.2 Gen 1 connection (5 Gbit/s) for fast data transfer & charging function: 2x 4.5W (5V/0.9A)
- 1x USB-C 3.2 Gen 1 port (5 Gbit/s) for fast data transfer & charging function: 1x 10W (5V/2A)
- 3x USB-A 2.0 (480 Mbit/s) for proven data transfer & charging function: 2x 4.5W (5V/0.9A)
- 1x USB-C Power Delivery - 100 watts max. (85W host, 15W dock)
- Chipset information: CS5366, GL3510, FE8.1
- Supports DP 1.4 Alt Mode, backwards compatible to DP 1.2 Alt Mode (DisplayPort Alternate Mode)
- Supports HDCP 1.4, HDCP 1.3
- Product color: Grey
- Housing: Aluminum

- Weight: 70g
- Dimensions: L 13.7 x W 4.6 x H 1.3 cm
- Operating temperature : 0°C - + 45°C
- Cable length: 18 cm
- Cable color: Light grey
- Notes:
- Extend/mirror screen: With common operating systems, including macOS, both extension and mirroring to an external monitor is possible
- Not all USB-C ports support all functions of the USB-C standard. Make sure that the USB-C port on your notebook supports DisplayPort Alternate Mode (DP-Alt Mode) and USB Power Delivery (PD)
- The video output capability (actual resolution) depends on the graphics card of your notebook, the connected monitor and the DP mode.
- To use the full range of functions, the notebook must support DP 1.4 Alt Mode
- Compatibility exists with the following operating systems up to their current versions: From Windows 7, from macOS 12, from iPhone 15 (iOS) , from iPadOS 16, from Android 14, from ChromeOS 116.0.5845.120

Attributes

- Kućište: aluminij
- LAN priključak (RJ45): Ne
- rezolucija maks.: 3840 x 2160 piksela, 60 Hz
- USB-C napajanje: 100 W
- Broj priključaka za displej: 1
- Broj USB A priključaka: 5
- Broj USB-C priključaka: 2
- Broj video priključaka: 1
- Čitač kartica: Ne
- Priključci za video vezu: HDMI



Package contents

- 1x USB-C docking station, 8-port
- 1x QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	14.00	59.00	36.00	24.00	50,976.00
Packaging Unit Inside	1	0.14	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.14	19.20	11.00	2.30	485.76
Net single without Packaging	1	0.07	12.90	4.90	1.00	0.00

More images:

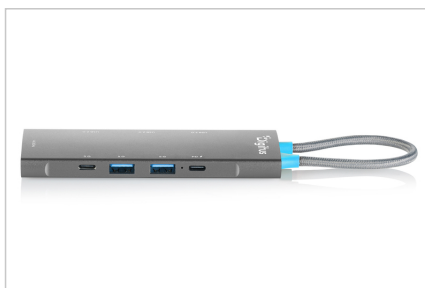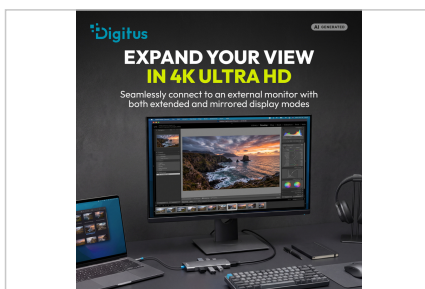

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.

- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com