

DIGITUS® USB-C Docking Station, 9-Port

DA-70922

EAN 4016032510178



USB-C Docking Station, 9-Port 2x HDMI, 5x USB 3.2 Gen 1, 1x RJ45, 1x PD

The ideal solution for boosting your productivity at work: With two HDMI ports (4K/60Hz), you can easily expand your setup to include two additional external monitors and enjoy an even better overview and more efficient multitasking. Even when using just one external monitor, you can easily extend your display with common operating systems, including macOS. When using two monitors, the docking station supports an extended display in MST (Multi Stream Transport) mode with up to 2x 4K/60Hz—depending on the operating system. In SST mode (Single Stream Transport), mirroring is possible at up to 2x 4K/60Hz. Four USB-A 3.2 Gen 1 ports and one USB-C 3.2 Gen 1 port (5 Gbit/s each) offer fast data transfers and versatile connectivity options for your peripherals. The USB-C Power Delivery 3.0 port reliably powers your laptop while simultaneously charging other devices. The built-in Gigabit Ethernet port (RJ45) also ensures a stable and fast wired network connection. The permanently integrated USB-C cable (18 cm) provides a direct and flexible connection to the host PC and can be stowed inside the housing to save space when needed. Support for DP 1.4 Alt Mode (backward compatible with DP 1.2) ensures high image quality. The overall package is rounded out by a robust and durable aluminum housing that ensures stability and high-quality craftsmanship.

An organized workspace thanks to our solution—well-equipped to handle any challenge

- Connections:
- 1x USB-C (3.2 Gen 2) Input - Host PC Connection
- 2x HDMI (2.0) Outputs - Max. Resolution: UHD 4K/60Hz
- 4x USB-A 3.2 Gen 1 ports (5 Gbit/s) for fast data transfer & charging: 4x 4.5W (5V/0.9A)
- 1x USB-C 3.2 Gen 1 port (5 Gbit/s) for fast data transfer and charging: 1x 10 W (5V/2A)
- 1x RJ45 Gigabit Ethernet - 10/100/1000 Mbit/s bandwidth with MAC address passthrough
- 1x USB-C Power Delivery - 100 watts max. (85W host, 15W dock)
- Chipset Information: LT8712SX, GL3510, RTL8153E
- Supports DP 1.4 Alt Mode; backward compatible with DP 1.2 Alt Mode (DisplayPort Alternate Mode)
- Supports HDCP 1.4, HDCP 1.3
- Product Color: Gray
- Housing: Aluminum/Plastic
- Weight: 73 g
- Dimensions: L 13.7 x W 4.6 x H 1.3 cm
- Operating temperature: 0°C - +45°C
- Cable length: 18 cm

- Cable color: Light gray
- Notes:
- Extend/Mirror Screen: With common operating systems, including macOS, you can both extend and mirror your screen to an external monitor
- Supports dual monitors with 2x 4K/60Hz in MST mode (Multi-Stream Transport Mode / Screen Extension)—depending on the operating system
- Supports dual monitors with 2x 4K/60Hz in SST mode (Single Stream Transport Mode / Screen Mirroring)
- Not all USB-C ports support all features of the USB-C standard. Make sure your laptop's USB-C port supports DisplayPort Alternate Mode (DP-Alt Mode) and USB Power Delivery (PD).
- Video output capability (actual resolution) depends on your laptop's graphics card, the connected monitor, and the DP mode.
- To take full advantage of all features, the laptop must support DP 1.4 Alt Mode
- It is compatible with the following operating systems up to their current versions: Windows 7 and later, macOS 12 and later, iPhone 15 (iOS) and later, iPadOS 16 and later, Android 14 and later, ChromeOS 116.0.5845.120 and later
- MST is supported on: Windows, Chrome OS
- SST is supported on: Windows, macOS, iOS, iPadOS, Android, ChromeOS

Attributes

- Kućište: aluminij
- LAN priključak (RJ45): Da
- rezolucija maks.: 3840 x 2160 piksela, 60 Hz
- USB-C napajanje: 100 W
- Broj mrežnih priključaka: 1
- Broj priključaka za displej: 2
- Broj USB A priključaka: 4
- Broj USB-C priključaka: 1
- Broj video priključaka: 2
- Čitač kartica: Ne
- Priključci za video vezu: HDMI




Package contents

- 1 USB-C docking station, 9-port
- 1 QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	14.00	59.00	36.00	24.00	50,976.00
Packaging Unit Inside	1	0.14	19.20	11.00	2.30	485.76
Packaging Unit Single	1	0.14	19.20	11.00	2.30	485.76
Net single without Packaging	1	0.07	12.90	4.90	1.00	0.00

More images:

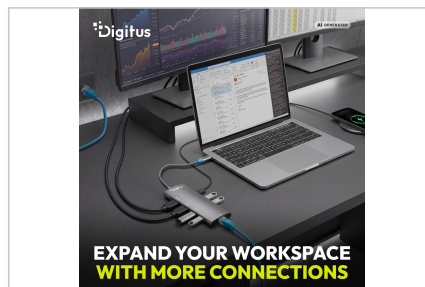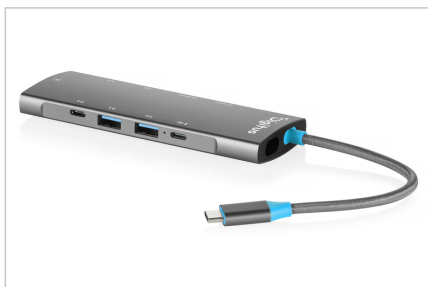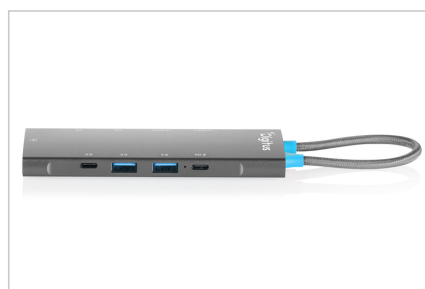

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.

- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com