# DIGITUS® Wall-mounted industrial cabinet, IP66, 500x500x250 mm

**DN-505025**

**EAN 4016032511878**



**Industrial wall-mounted enclosure, 500x500x250 mm IP66, incl. mounting plate, grey (RAL 7035)**

The DIGITUS® industrial cabinet is a compact steel enclosure designed for use in the most demanding indoor and outdoor environments. With its built-in mounting plate, the enclosure allows for the flexible installation of a wide variety of devices, depending on application requirements. Furthermore, the mounting plate is removable. This makes repair and maintenance work easier to perform. Each cabinet is made of robust cold-rolled steel and, thanks to the corner press process used in production, features few weld seams. A flange plate is located in the base of the enclosure for secure cable entry. The DIGITUS® industrial cabinet range includes various enclosure sizes for optimal customization for your next project, whether for building automation, control panel construction, or extensive automation and industrial systems.

**Compact industrial enclosure for use in demanding environments. Versatile installation options thanks to the integrated mounting plate. Ideal for building services, control panel construction, automation, and industrial systems.**

- Protection rating: IP65
- Protection Class (IK Impact Resistance Rating): IK10
- NEMA Protection Rating: 4X
- Cold-rolled steel with a wall thickness of 1.2 mm
- Max. weight capacity: 30 kg
- Door opening angle: 110°
- Door with a PU foam gasket running all the way around
- Operating temperature range: -40 °C to +80 °C
- Heat-curing powder coating with a surface finish in RAL 7035 gray
- Front-locking cylinder lock with double-bit key
- Includes grounding cable
- Usable mounting depth: 215 mm
- Mounting plate material thickness: 1.5 mm
- Mounting Plate Dimensions (H x W): 450 x 450 mm
- Product dimensions (H x W x D): 500 x 500 x 250 mm
- Package Dimensions (H x W x D): 530 x 530 x 280 mm
- Net Weight/Gross Weight: 15.1 kg/15.9 kg

**Attributes**

- Mounted: no

**Package contents**

- 1 x enclosure
- 1 x key
- 1 x grounding cable
- 4 x wall mount

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Inside** | 1 | 0.00 | 28.00 | 53.00 | 53.00 | 78,652.00 |
| **Packaging Unit Single** | 1 | 0.00 | 28.00 | 53.00 | 53.00 | 78,652.00 |
| **Net single without Packaging** | 1 | 15.10 | 25.00 | 50.00 | 50.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.


**More images:**









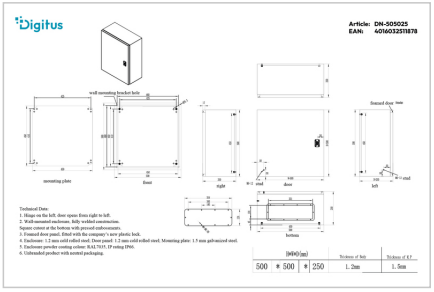


**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com