

# Ubiquiti Ubiquiti USG-PRO-4 - UniFi Security Gateway, Pro Version, 4 Ports

UB-USG-PRO  
EAN 0810354022821



Affordable Enterprise Network Security: Ubiquiti Networks introduces the UniFi® Security Gateway, which extends the UniFi Enterprise System to encompass routing and security for your network. Available in two models, the UniFi Security Gateway combines reliable security features with high-performance routing technology in a cost-effective unit. Powerful Firewall Performance: The UniFi Security Gateway offers advanced firewall policies to protect your network and its data. Convenient VLAN Support: The UniFi Security Gateway can create virtual network segments for security and network traffic management. VPN Server for Secure Communications: A site-to-site VPN secures and encrypts private data communications traveling over the Internet. QoS for Enterprise VoIP and Video: Top QoS priority is assigned to voice and video traffic for clear calls and lag-free, video streaming. The UniFi Security Gateway is deployed in the same manner as UniFi Access Points for wireless networking. Use the intuitive UniFi Controller to conduct device detection, provisioning, and management. USG-PRO-4: The USG-PRO-4 offers optional SFP ports for fiber connectivity to support backhaul applications. (2) 10/100/1000 RJ45 Ports (2) 10/100/1000 RJ45/SFP Combination Ports (1) RJ45 Serial Console Port Rack-Mounting Capability Layer 3 Forwarding Performance Packet Size of 64 Bytes: 1.000.000 pps Packet Size of 514 Bytes or Larger: 1 Gbps per Port Line Rate




- Dimensions: 484 x 44 x 164 mm (19.06 x 1.73 x 6.46")

- Weight: 2.3 kg (5.07 lb)
- Max. Power Consumption: 40 W
- Power Supply: Internal AC/DC Power Adapter, 60 W (24 V, 2.5 A)
- Power Input: 110 - 240VAC
- LEDs:
- System: Status
- Data Ports: Speed/Link/Activity
- Networking Interfaces:
- Serial Console Port: (1) RJ45 Serial Port
- Data Ports:
- (2) 10/100/1000 RJ45 Ports
- (2) 10/100/1000 RJ45/SFP Combination Ports
- Layer 3 Forwarding Performance:
- Packet Size 64 Bytes: 1.000.000 pps
- Packet Size 512 Bytes or larger: 1 Gbps per Port Line Rate
- Processor: Dual-Core 1 GHz, MIPS64 with Hardware Acceleration for Packet Processing
- System Memory: 2 GB DDR3 RAM
- On-Board Flash Storage: 4 GB
- Certifications: CE, FCC, IC
- Rackmount: Yes
- Operating Temperature: -10°C to 45°C (14°F to 113°F)
- Operating Humidity: 10 to 90% non-condensing

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	2.30	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	2.30	0.00	0.00	0.00	0.00
Packaging Unit Single	1	2.30	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

---

**More images:**

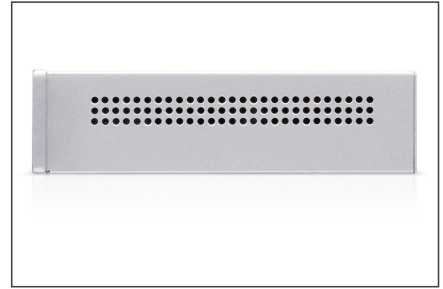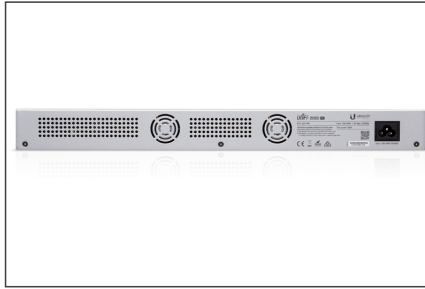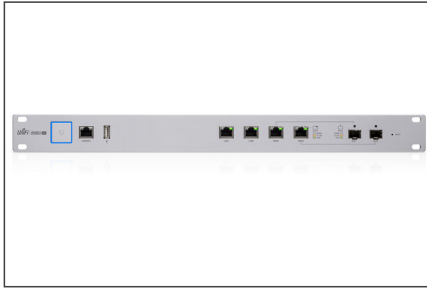

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

Discomp s.r.o

Dopravni 1218/2a

Plzen, Czech Republic

<https://www.discomp.cz/>

[info@discomp.cz](mailto:info@discomp.cz)