Ubiquiti Ubiquiti UDM - UniFi Dream Machine

UB-UDM EAN 0817882025966



Build your home or office network with the UniFi(R) Dream Machine, model UDM. Powered by a fast 1.7 GHz quadcore processor, the UDM combines multiple functions into a single elegant device: Highperformance 802.11ac 4x4 Wave 2 access point (AP) Managed 4-port Gigabit switch Advanced security gateway UniFi Network Controller The UDM is the ideal first UniFi device. Its easy to use and still offers all the benefits of UniFi for homes and businesses. Easily expand the UDM by adding more UniFi switches or APs while managing the network with the integrated controller. The UniFi Network app and UniFi cloud provide remote access to the controller from anywhere. The entire network can be kept updated and safe with automated software updates, which are free of charge.


- Dimensions: 110 x 184.2 mm (4.33 x 7.25")
- Weight: 1.05 kg (2.32 lb)
- Networking interface: (4) LAN 10/100/1000 RJ45 ports; (1) WAN 10/100/1000 RJ45 port
- Buttons: Reset
- IDS/IPS throughput: 1 Gbps
- Processor: Arm Cortex-A57 Quad-Core at 1.7 GHz



- System memory: 2 GB DDR RAM
- On-board Flash storage: 16 GB
- Maximum power consumption: 26 W
- Supported voltage range: 100 240 V AC
- Power method: AC power cord
- Power supply: Internal AC/DC power adapter (24 V, 0.6 A, 100 -240 V AC)
- Power save: Supported
- Beamforming: Supported TX power: 2.4 GHz: 23 dBm; 5 GHz: 30 dBm
- Antenna: (1) dual-band, quad-polarity antenna
- Antenna gain: 2.4 GHz: 3 dBi; 5 GHz: 4.5 dBi
- Wi-Fi standards: 802.11 a/b/g/n/ac/ac-wave2
- Wireless security: WEP, WPA-PSK, WPA-Enterprise (WPA/WPA2, TKIP/AES), 802.11w/PMF
- BSSID: Up to 8 per radio
- Operating temperature: -10°C to 45°C (14°F to 113°F)
- Operating humidity: 5 to 95% non-condensing
- Certifications: CE, FCC, IC

| Logistics | | | | | | |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 6 | 6.96 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Inside | 1 | 1.16 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 1.16 | 0.00 | 0.00 | 0.00 | 0.00 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

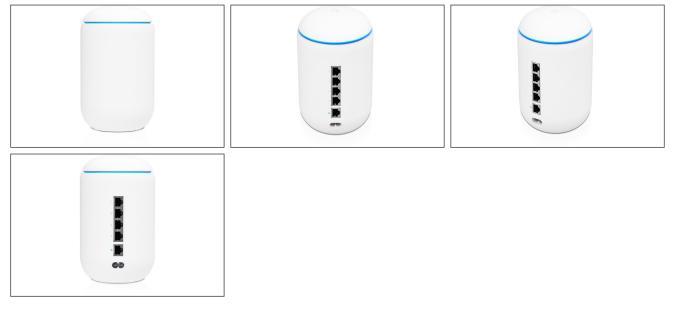

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

Discomp s.r.o Dopravni 1218/2a Plzen, Czech Republic https://www.discomp.cz/ info@discomp.cz