

# TP-Link BE12000 Ceiling-mounted Tri-Band Wi-Fi 7 Access Point

EAP787  
EAN 1210002600569



Omada BE12000 Ceiling Mounted Tri-Band Wi-Fi 7 Access Point PORT: 1x10G RJ45 port SPEED: 688 Mbps at 2.4 GHz + 5760 Mbps at 5 GHz + 5760 Mbps at 6 GHz FEATURES: 802.3bt POE++ and 12V DC (power adapter not included), 6xinternal antennas, 8 streams, dedicated RF scan, MU-MIMO, 320MHz supported, seamless roaming, band control, beamforming, load balancing, airtime fairness, MLO, 4K-QAM, centralized management by Omada SDN controller, Omada app

### BE12000 Ceiling-mounted Tri-Band Wi-Fi 7 Access Point

- 1x 10G/2.5G Ethernet port
- Power supply: 802.3bt/at PoE or 12V/2.5A DC


- Power consumption: 26.3W (for PoE); 22.4 W (for DC)
- Signal Rate: 688 Mbps (2.4 GHz) + 5765 Mbps (5 GHz) + 5765 Mbps (6 GHz)
- Operating Temperature: 0°C - 40°C (32°F - 104°F)
- Storage temperature: -40°C-70°C (-40°F-158°F)

### Package contents

- EAP787
- Short installation guide
- Ceiling/Wall/Junction Box Mounting Kit
- Note: AC adapter is NOT included.

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	6	8.64	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	2,963.70

### More images:

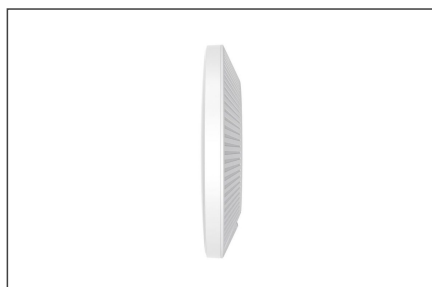

---

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH  
Am Trippelsberg 100  
Düsseldorf, Germany  
<https://www.tp-link.com/de/>  
[support.de@tp-link.com](mailto:support.de@tp-link.com)