

TP-Link Omada 6-Port Gigabit Industrial Easy Managed Switch with 3-Port PoE+ and 1-Port PoE++

IES206GPP
EAN 1210002602051



Omada 6-Port Gigabit Industrial Easy Managed Switch with 3-Port PoE+ and 1-Port PoE++ PORT: 1× Gigabit PoE++ Port, 3× Gigabit PoE+ Ports, 1×Gigabit SFP Slot, 1× Combo Gigabit RJ45/SFP Port
 SPECIFICATION: 802.3 AF/AT/BT Type3, up to 120W PoE power (depending on power input specifications), -40-75°C operating temperature, DIN rail/wall mount aluminum chassis and fanless
 Power supply: Double 12-57V DC input, power adapter is not included
 FUNCTION: Centralized management through Omada SDN Controller, Omada app. Flow Control, Loopback Detection, Port Mirroring, LAG, VLAN, IGMP Snooping, QoS, Storm Control

Omada 6-Port Gigabit Industrial Easy Managed Switch with 3-Port PoE+ and 1-Port PoE++

- 1× 10/100/1000 Mbps PoE++ RJ45 ports
- 3× 10/100/1000 Mbps PoE+ RJ45 ports
- 1× Gigabit SFP/RJ45 combo slot
- 1× Gigabit SFP slot
- Mounting: DIN rail / wall mounting

- Power supply: Terminal block 12-57V 1+1 redundant DC input
- Operating Temperature: -40°C~75°C (-40°F~167°F)
- Storage Temperature: -40°C~85°C (-40°F~185°F)

Attributes



- Industrial usage: no
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no

Package contents

- IES206GPP
- Short installation guide
- DIN-Rail mounting bracket
- Wall mounting plates

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	4	5.48	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	1.75

More images:

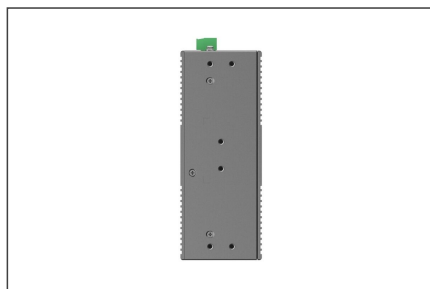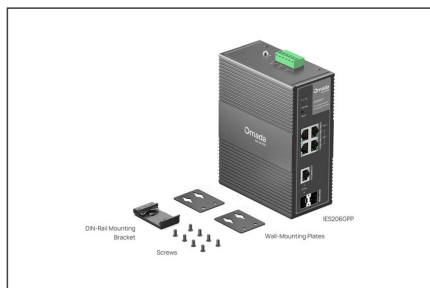

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH
Am Trippelsberg 100
Düsseldorf, Germany
<https://www.tp-link.com/de/>
support.de@tp-link.com