

# TP-Link Omada 10-Port Gigabit Industrial Easy Managed Switch with 6-Port PoE+ and 2-Port PoE++

**IES210GPP**  
**EAN 1210002602112**



Omada 10-Port Gigabit Industrial Easy Managed Switch with 6-Port PoE+ and 2-Port PoE++ PORT: 2x Gigabit PoE++ Port, 6x Gigabit PoE+ Ports, 2x Gigabit Non-PoE Ports, 2x Combo Gigabit SFP Slots  
 SPECIFICATION: 802.3 af/AT/BT Type3, up to 240W PoE power (depending on power input specifications), -40-75°C operating temperature, DIN rail/wall mount aluminum enclosure and fanless  
 Power supply: Double 12-57V DC input, power adapter is not included  
 FUNCTION: Centralized management by Omada SDN Controller, Omada App. Flow Control, Loopback Detection, Port Isolation, Port Mirroring, LAG, VLAN, IGMP Snooping, QoS, Storm Control

**Omada 10-Port Gigabit Industrial Easy Managed Switch with 6-Port PoE+ and 2-Port PoE++**

- 2x 10/100/1000 Mbps PoE++ RJ45 ports
- 6x 10/100/1000 Mbps PoE+ RJ45 ports
- 2x Gigabit SFP/RJ45 combo slots
- Mounting: DIN rail / wall mounting

- Power supply: Terminal block 12-57V 1+1 redundant DC input
- Operating Temperature: -40°C~75°C (-40°F~167°F)
- Storage Temperature: -40°C~85°C (-40°F~185°F)

**Attributes**



- Industrial usage: no
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no


**Package contents**

- IES210GPP
- Short installation guide
- DIN-Rail mounting bracket
- Wall mounting plates

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	4	5.68	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	1.75

**More images:**

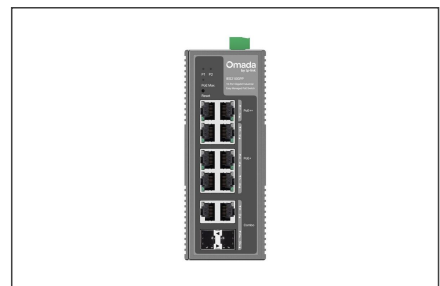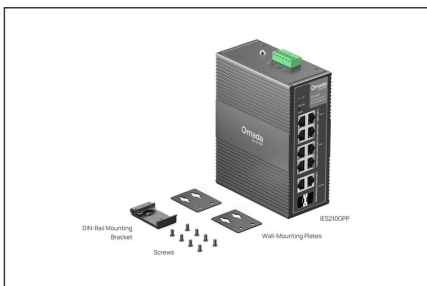

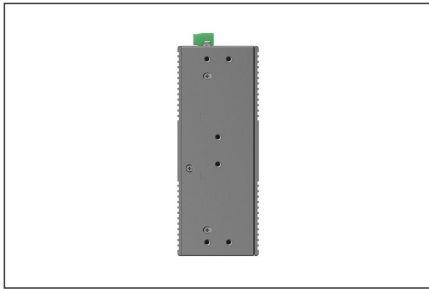

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH  
Am Trippelsberg 100  
Düsseldorf, Germany  
<https://www.tp-link.com/de/>  
[support.de@tp-link.com](mailto:support.de@tp-link.com)