

# TP-Link AX1800 Wi-Fi 6 Outdoor Access Point

**EAP603-OUTDOOR**  
**EAN 1210002605731**



AX1800 Indoor/Outdoor Dual-Band Wi-Fi 6 Access Point PORT: 1× Gigabit RJ45 port SPEED: 574 Mbps at 2.4 GHz + 1201 Mbps at 5 GHz FEATURE: 802.3at PoE and passive PoE, IP65 weatherproof, 2×external antennas, 4 streams, mesh, seamless roaming, MU-MIMO, band control, beamforming, load balancing, airtime fairness, centralized management by Omada SDN controller, Omada App

**AX1800 Wi-Fi 6 Outdoor Access Point**

- 1× 10M/100M/1000Mbps Gigabit Ethernet port (RJ45); PoE in
- 1× Grounding appointment
- Power consumption: 802.3at (PoE+): 15.8W; Idle Mode: 4.8W (PoE)


- Signal rate: 2.4 GHz: up to 573 Mbps; 5 GHz: up to 1201 Mbps
- Operating Temperature: -30°C-70°C (-22°F-158°F)
- Storage temperature: -40°C-70°C (-40°F-158°F)


**Package contents**

- EAP603-Outdoor
- Short installation guide
- Passive PoE Adapter
- Power cable
- Mounting kit
- Waterproof kit

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	16	14.88	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	2,963.70

**More images:**

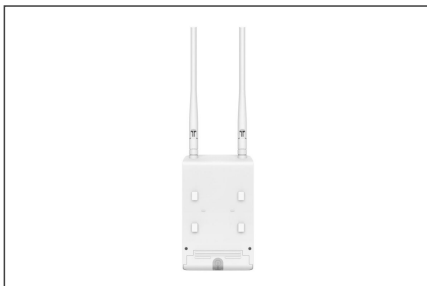

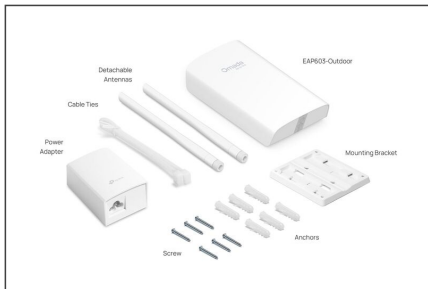

### **EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH  
Am Trippelsberg 100  
Düsseldorf, Germany  
<https://www.tp-link.com/de/>  
[support.de@tp-link.com](mailto:support.de@tp-link.com)