

TP-Link BE9300 Wi-Fi 7 Wall Panel Access Point

EAP775-WALL
EAN 1210002619080



BE11000 Wall Plate Tri-Band Wi-Fi 7 Access Point PORT: Uplink: 1x 2.5G RJ45 port; Downlink: 1x 2.5G RJ45 port +3x 1G RJ45 port SPEED: 688 Mbps at 2.4 GHz + 4320 Mbps at 5 GHz + 5760 Mbps at 6 GHz FUNCTION: Compatible with US standard branch box, 802.3 bt/at PoE, PoE passthrough, 6 streams, 4xinternal antennas, Bluetooth, MU-MIMO, 320MHz support, seamless roaming, band control, beamforming, load balance, airtime fairness, MLO, 4K-QAM, centralized management by Omada SDN controller, Omada app, 168 x 86 x 39 mm

BE11000 Wi-Fi 7 Access Point with Wall Panels

- Uplink: 1x 2.5G Ethernet port
- Downlink: 1x 2.5G Ethernet port + 3x Gigabit Ethernet ports


- Paintable envelope
- Physical Theft Protection: Yes
- Power consumption: 43.35W (with 25W PoE out)
- 6 GHz: Up to 5765 Mbps / 5 GHz: Up to 2882 Mbps / 2.4 GHz: Up to 688 Mbps
- Operating temperature: 0-40 °C (32-104 °F)
- Storage Temperature: -40-70°C (-40-158°F)


Package contents

- EAP775-Wall
- Quick Start Guide
- Paintable envelope
- Mounting kit

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	16	12.32	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	2,963.70

More images:

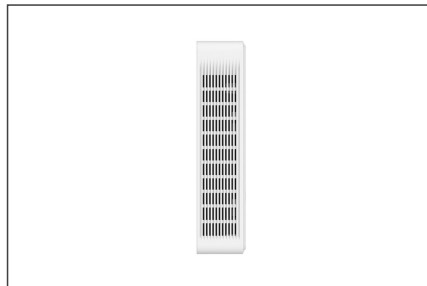

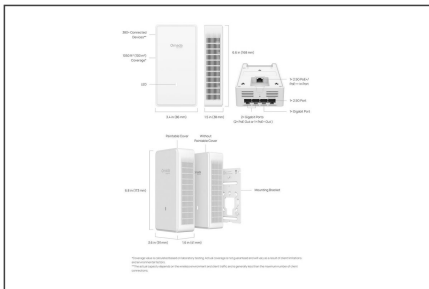

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH
Am Trippelsberg 100
Düsseldorf, Germany
<https://www.tp-link.com/de/>
support.de@tp-link.com