


DIGITUS Premium CAT 5e SF-UTP crossover patch cord

DK-1531-020-CO
EAN 4016032215837

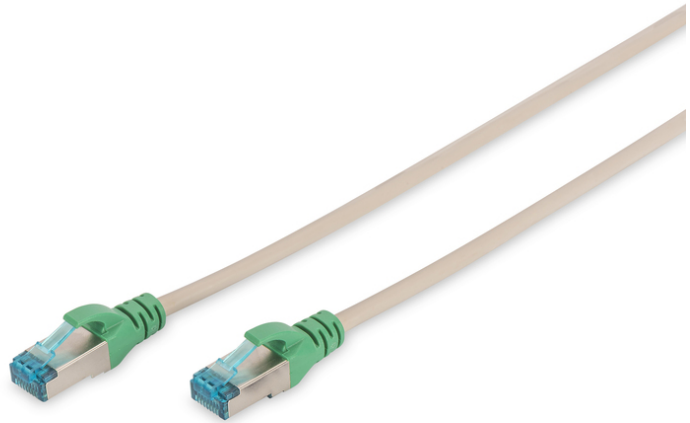

CAT 5e SF-UTP crossover patch cord, Cu, PVC AWG 26/7, length 2 m, color grey

The DIGITUS® Category CAT5e, Class D, SF-UTP patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 CAT 5e specifications. DIGITUS® patch cords will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® CAT 5e cabling. DIGITUS® offers a various range of colors and lengths. The cable length is stated on each connector and it is suitable for use in routers, switches servers and other active and passive components. The cables are packed in individual DIGITUS® polybags.

Future-oriented standards and high-end quality for your network.

- 2x RJ45 (8P8C) connectors
- Boots with kink protections and strain reliefs
- Length marking on boot

- 4 x 2 AWG 24/7, twisted pair
- Conductor: Cu



Attributes


- Assortment: Twisted Pair Patch Cables
- Configuration: crossover
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 5e
- Shielding: SF-UTP, foil and braid shielding
- Length: 2 m
- Color: grey
- Jacket: PVC
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	150	11.60	46.00	33.00	28.00	42.50
Packaging Unit Inside	1	0.06	12.00	25.00	30.00	9.00
Packaging Unit Single	1	0.08	1.60	14.00	25.00	560.00
Net single without Packaging	0	0.06	200.00	1.17	1.27	297.18

More images:

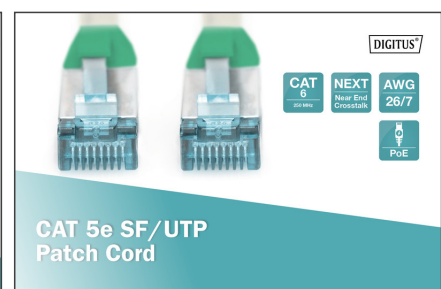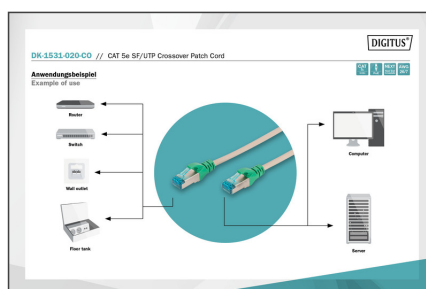

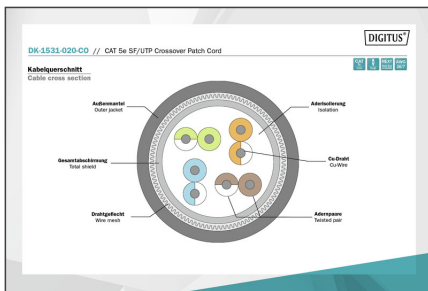

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com