

# DIGITUS Fiber Optic Multimode Patch Cord, OM 3, ST / ST

DK-2511-05/3  
EAN 4016032248309



**FO patch cord, duplex, ST to ST MM OM3 50/125  $\mu$ , 5m**  
FO patch cord, duplex, ST to ST,MM OM3 50/125  $\mu$ , 5m  
**Future-oriented standards and high-end quality for your network.**



- Duplex cable
- LSOH
- Connector with ceramic ferrule
- Cable diameter 2 mm
- Single packed with test-report

**Attributes**

- Boot: two-color
- Cable diameter: 2 mm
- Color cable: aqua
- Connector 1: ST
- Connector 2: ST
- Fiber class: OM3
- Fiber diameter: 50/125 $\mu$
- Mode: Multimode
- Length: 5 m

| Logistics                    |              |             |            |            |             |        |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³    |
| Packaging Unit Carton        | 100          | 6.20        | 46.00      | 36.00      | 24.00       | 39.74  |
| Packaging Unit Inside        | 1            | 0.06        | 19.00      | 36.00      | 6.00        | 4.10   |
| Packaging Unit Single        | 1            | 0.06        | 2.00       | 20.00      | 30.00       | 1.20   |
| Net single without Packaging | 0            | 0.00        | 2.00       | 19.00      | 19.00       | 722.00 |

**More images:**

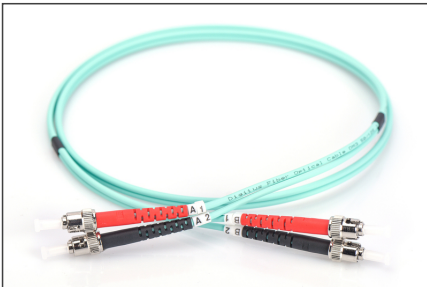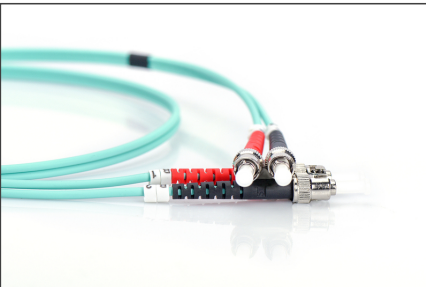

|                     |                  |      |          |      |
|---------------------|------------------|------|----------|------|
| Part No.            | DK-2511-05/3     |      |          |      |
| Lenght              | 5 m              |      |          |      |
| Cable Type          | Duplex MM 50/125 |      | OM3 LSZH |      |
|                     | END A            |      | END B    |      |
| Connector Type      | ST               |      | ST       |      |
| Insertion Loss (dB) | 0.09             | 0.05 | 0.16     | 0.15 |
| Return Loss (dB)    | 39.0             | 39.7 | 36.5     | 36.9 |
| Q.C.                | PASS             |      |          |      |

#### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)