

# DIGITUS Fiber Optic Multimode Patch Cord, OM 3, LC / LC

DK-2533-05/3  
EAN 4016032248880



**FO patch cord, duplex, LC to LC MM OM3 50/125  $\mu$ , 5 m**

FO patch cord, duplex, LC to LC,MM OM3 50/125  $\mu$ , 5 m

**Future-oriented standards and high-end quality for your network.**

- Duplex cable
- LSOH
- Connector with ceramic ferrule
- Cable diameter 2 mm
- Single packed with test-report


**Attributes**

- Assortment: Fiber Optic Patch Cables

- Boot: single-color
- Cable diameter: 2 mm
- Cable type: I-VH 2G50/125 $\mu$
- Color cable: aqua
- Connector 1: LC
- Connector 2: LC
- Fiber class: OM3
- Fiber diameter: 50/125 $\mu$
- Mode: Multimode
- Packaging: DIGITUS Polybag
- Length: 5 m

| Logistics                    |                 |                |               |               |                |                 |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------------|
|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 80              | 7.60           | 60.50         | 37.00         | 31.50          | 70,512.80       |
| Packaging Unit Inside        | 1               | 0.08           | 17.50         | 19.50         | 14.00          | 4,777.50        |
| Packaging Unit Single        | 1               | 0.10           | 2.50          | 20.00         | 30.00          | 1.50            |
| Net single without Packaging | 0               | 0.07           | 17.00         | 15.50         | 2.50           | 658.75          |

**More images:**

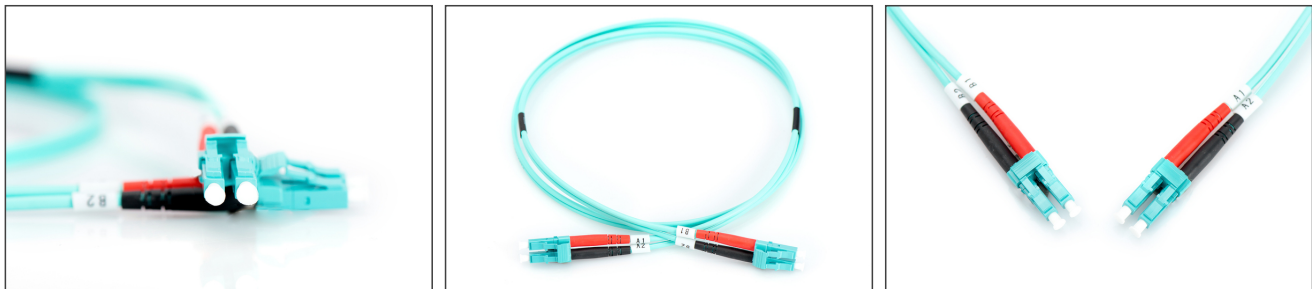

|                     |                  |      |          |      |
|---------------------|------------------|------|----------|------|
| Part No.            | DK-2533-05/3     |      |          |      |
| Lenght              | 5 m              |      |          |      |
| Cable Type          | Duplex MM 50/125 |      | OM3 LSZH |      |
|                     | END A            |      | END B    |      |
| Connector Type      | LC               |      | LC       |      |
| Insertion Loss (dB) | 0.14             | 0.13 | 0.05     | 0.05 |
| Return Loss (dB)    | 33.5             | 31   | 30.6     | 31.7 |
| Q.C.                | PASS             |      |          |      |

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)