DIGITUS® Power Cord extension

AK-440201-050-S

EAN 4016032311904



Power Cord extension cable, C14 - C13 M/F, 5.0m, H05VV-F3G 1.0qmm, sw

This power cord is used to connect the power supply unit of the PC with the Monitor whereby one power socket less needs to be used. Additional you can use this cable for extension.

Corresponds to the European guidelines

Attributes

- Assortment: Device Connection Cables
- Cable standard: H05 VV F3G
- Color cable: black
- Color connector: black
- Connector 1: IEC C14, plug
- Connector 2: IEC C13, jack
- Connector surface: nickel-plated
- Current load capacity: 250V/10A
- Hoods: molded
- Lead cross-section: 0.75qmm
- Packaging: Polybag
- Wire material: CU
- Length: 5 m
- Shielding: Unshielded

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	14.25	55.00	36.50	20.00	40.15
Packaging Unit Inside	1	0.45	34.00	20.00	9.00	6.12
Packaging Unit Single	1	0.48	6.00	18.00	20.00	2.16
Net single without Packaging	0	0.42	17.00	15.00	5.00	1.28

More images:







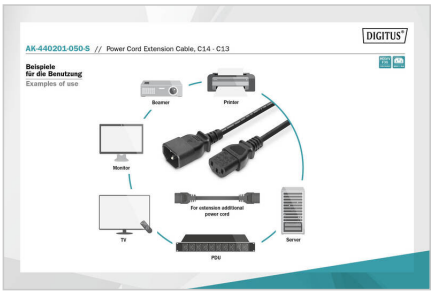



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com