

# DIGITUS HDMI High Speed with Ethernet Connection Cable

**AK-330114-020-S**  
**EAN 4016032322979**



## HDMI High Speed Connection Cable, Type A, w/Ethern M/M, 2.0m, Ultra HD, 4K@30Hz, gold, bl

This 4K Ultra HD and 3D supporting cable used for connection of audio/video devices such as Blu-ray player, game pads or consoles, etc., for example, with a TV, Monitor or Computer.

### Supports Full HD and 3D and provides Ethernet connectivity.

- Support up to 4K 30Hz
- Support Ultra HD 4K
- HDMI 1.4
- 8.16 Gbps
- Support 3D
- Support Audio Return Channel (ARC)
- Support Consumer Electronic Control (CEC)
- Support Lip-Sync (audio/video synchronisation)
- Dolby TrueHD capable

- With Ethernet Channel (HEC)



### Attributes

- Assortment: HDMI Cables
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold flash
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	9.40	40.00	38.00	21.00	31.92
Packaging Unit Inside	1	0.12	5.00	44.00	44.00	9.68
Packaging Unit Single	1	0.12	24.00	16.00	2.00	768.00
Net single without Packaging	0	0.00	15.00	14.00	2.00	420.00

## More images:

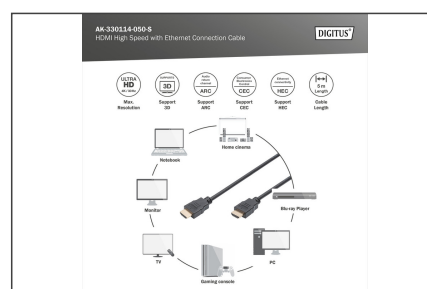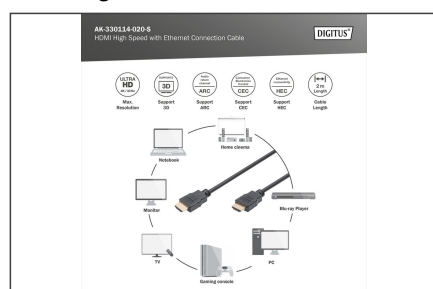

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)