

DIGITUS® VGA Splitter 500MHz, 2-Port

DS-41110

EAN 4016032323808



Video Splitter 1 PC, 2 Monitors 500 MHz, HDSUB 15/M - 2xHDSUB 15/F, Max. 2048x1536p

With a video splitter you can use one video source to display identical images on 2, 4, 8, or 16 monitors - or on even more screens by means of cascading. Thus, a video splitter can be used in various application fields, e.g. test bench facilities, data centers, help desks, video broadcasting, presentations and educational facilities.

Provides simultaneous display on two different monitors - Perfect for classrooms, tradeshows, or in-store displays

- Enables to split a video-signal from a PC onto 2 monitors, or other video output devices
- Video bandwidth: 500MHz
- Max. resolution: 2048x1536p @60Hz
- Max. transmission distance: 75m

- Cascadable (max. 64)
- Metal housing for better EMI shielding
- DDC, DDC2, DDC2B support
- Video IN/OUT: HD DSUB, 15-pin, jacks

Attributes

- HDTV Standard: Full HD
- Number of ports: 2
- Resolution max.: 2048 x 1536 Pixel, 60Hz
- Signal input: VGA
- Signal output: VGA


Package contents

- VGA Splitter 500 MHz, 2-Port
- Power supply
- Manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	21.00	27.00	55.00	49.00	72.77
Packaging Unit Inside	1	2.10	6.50	25.00	15.00	2,437.50
Packaging Unit Single	1	2.10	6.50	25.00	15.00	2,437.50
Net single without Packaging	0	0.48	9.00	13.50	4.00	486.00

More images:

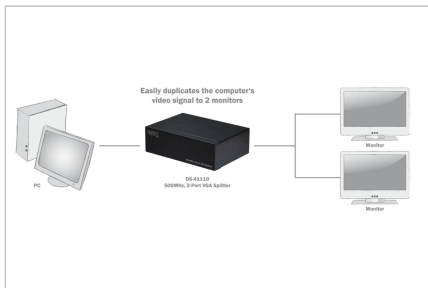

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com