


# DIGITUS CAT 6A U-FTP patch cord, Cu, PVC AWG 30/7, length 0.5 m, color Black

DK-1644-A-F-005/BL  
EAN 4016032348290

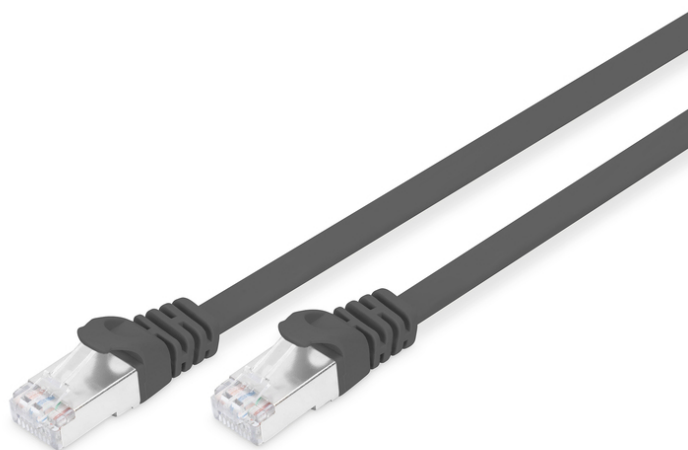

## CAT 6A U-FTP flat patch cable, PVC, Cu AWG 30, Length 0.5m , color black

The DIGITUS® Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

### Future-oriented standards and high-end quality for your network.


- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- Assortment: Twisted Pair Patch Cables

- Flat Version: YES
- Length: 0.5 m
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Category: CAT 6A
- Packaging: DIGITUS Polybag
- Color: Black
- Configuration: 1:1
- Jacket: PVC
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Structure: 4 x 2 AWG 30/7, twisted pair

### Attributes

- Assortment: Twisted Pair Patch Cables
- Category: CAT 6A
- Shielding: U-FTP, pairs in metal foil
- Length: 0.5 m
- Color: black
- Jacket: PVC
- Slim Version: yes
- Structure: 4 x 2 AWG 30/7
- Flat Version: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	5.90	48.00	28.00	26.00	34.94
Packaging Unit Inside	1	0.03	6.00	20.00	23.00	2.76
Packaging Unit Single	1	0.02	1.50	11.00	22.00	363.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

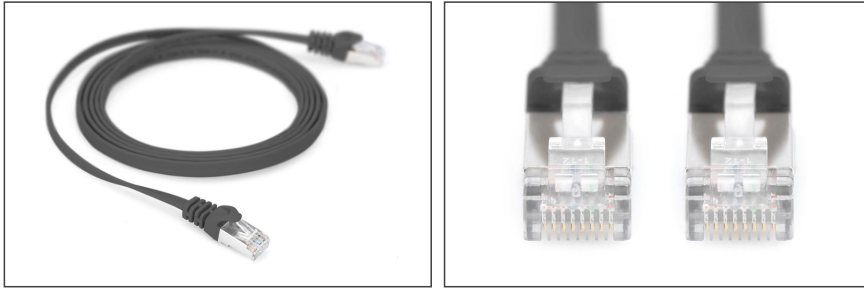**More images:****Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)