DIGITUS® VGA UTP extender set

DS-53400

EAN 4016032356721



VGA Extender over UTP, Set max. 1920x1200, signal extended by 300m, 0-70øC

Extends a VGA signal up to 300 m, using only a simple UTP cable between the transmitter and receiver units.

Provides simple and fast distribution for VGA video signals up to a distance of 300 m - place your screens wherever you want.

- Cat 5 VGA extender consisting of a transmitter and a receiver unit
- High resolutions up to 1920 x 1200 pixels possible
- Supports the extension of stereo audio signals
- Dimensions (L x W x H): 110 mm x 75 mm x 25 mm
- Weight: 213 g (transmitter), 208 g (receiver)
- Operating temperature: 0 °C ~ 70 °C
- Humidity: 10 % to 85 % (non-condensing)
- Power connection: 5 V @ 1 A, max 5 W
- Compression: Uncompressed

Attributes

- HDTV Standard: Full HD
- Resolution max.: 1920 x 1200 Pixel, 60Hz
- Category: CAT 5e
- Distance: 300 m
- KVM: no
- PoE (Power over Ethernet): no
- Transmission technology: CAT
- Video connection ports: VGA

Package contents

- 1x DIGITUS® VGA UTP extender
- 2 x power supply unit (5 V/1 A)
- 1x user manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	15.20	60.00	36.50	25.50	55.85
Packaging Unit Inside	1	0.76	27.30	17.50	5.50	2,627.62
Packaging Unit Single	1	0.76	27.30	17.50	5.50	2,627.62
Net single without Packaging	0	0.21	11.00	7.50	2.50	206.25

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:
















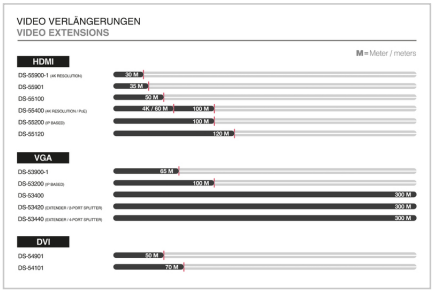

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com