


# DIGITUS® USB-C connection cable, USB-A - USB-C

DB-300136-010-S  
EAN 4016032383772

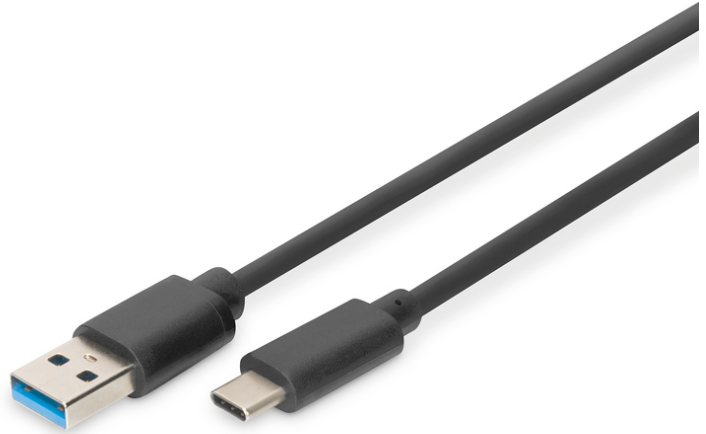

### USB Type-C connection cable, type C to A M/M, 1.0m, 3A, 5GB, 3.0, bl

For connecting external USB end devices (with C socket, e.g. tablet or smartphone) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 5 Gbps (super speed 10x faster than USB 2.0). Supports power supply up to 3A with USB 3.0 features. Supports PD (Power Delivery specifications).

#### For super-fast synchronization and charging



- SuperSpeed data transfers up to 5 Gbit/s - 10 times faster than USB 2.0
- Supports up to 3A power supply
- Supports the USB PD (power delivery) specification with 60W (20V/3A)
- Type C plug can be used on both sides
- Backwards compatible with USB 2.0 and 1.1

#### Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	11.20	24.00	16.00	28.00	10.75
Packaging Unit Inside	1	0.49	23.50	7.50	2.30	405.38
Packaging Unit Single	1	0.14	9.00	9.00	1.50	121.50
Net single without Packaging	0	0.11	0.00	0.00	0.00	0.00

**More images:**

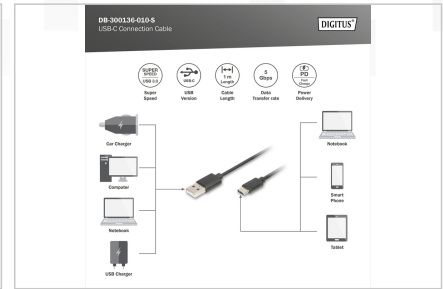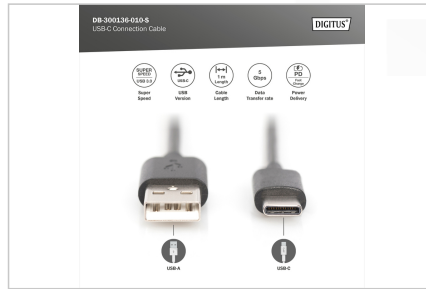

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)