

# DIGITUS HDMI 3in1 Adapter / Converter

**AK-330403-002-S**  
**EAN 4016032433866**



## HDMI Converter Cable, Type HDMI - DP,DVI,VGA M-F/F/F, 0.2m, 3in1 Multi-Media,UHD 4K, gold, bl

This adapter / converter will be used to connect your Computer, laptop or Blue-Ray Player with HDMI Type A interface to any DisplayPort, DVI or VGA display. The input HDMI signal will be converted to DisplayPort, DVI or VGA signals.

### No need to buy 3 single adapter

- Support 4K/2K with 30Hz
- HDMI 1.4 Data rate up to 3Gbit/s
- Compliant with DisplayPort 1.2a specification
- VGA resolution up to WUXGA 1920x1200 dpi (reduced blanking)
- DVI & VGA interfaces support Full HD 1080P@60Hz
- The USB connection (Type A plug) can be optional used for power supply.
- Plug and Play Installation



### Attributes

- Assortment: HDMI Cables
- AWG: 28/30
- Cable type: Dual-Link
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A/F + DVI-D(24+1)/F
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI
- HDTV Resolution max.: 4096 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	13.80	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	1	0.07	27.94	40.64	8.50	9,651.59
Packaging Unit Single	1	0.07	20.00	15.50	1.70	527.00
Net single without Packaging	0	0.06	23.70	4.00	1.60	151.68

### More images:

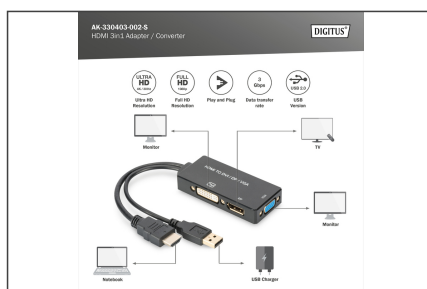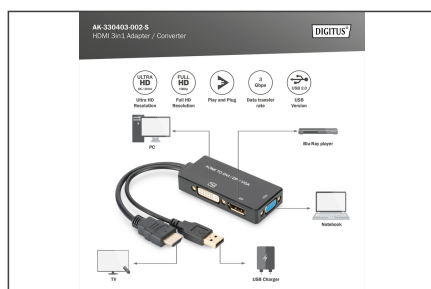

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)