

# DIGITUS® USB-C connection cable, USB-A - USB-C

AK-300148-030-S  
EAN 4016032437482



**USB Type-C connection cable, type USB-A to USB-C M/M, 3.0m, 5V3A, 15W, 480MB, 2.0 Version, bl**

For connecting external USB end devices (with C socket, e.g. tablet, notebook or smartphone) to the USB host (e.g. PC or notebook). Transfer rate up to 480 Mbps (high-speed).

**For super-fast synchronization and charging**


- High USB data transfer rate up to 480 Mbps
- Supports up to 5V3A, 15W power supply
- Supports the USB PD (Power Delivery) specification.
- Type C plug can be used on both sides

**Attributes**

- Assortment: USB Cables
- AWG: 30/22
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 3 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	60	7.00	40.00	30.00	18.00	21.60
Packaging Unit Inside	1	0.04	40.00	35.00	6.00	8.40
Packaging Unit Single	1	0.12	12.00	12.00	4.00	576.00
Net single without Packaging	0	0.10	13.00	13.00	4.00	676.00

**More images:**

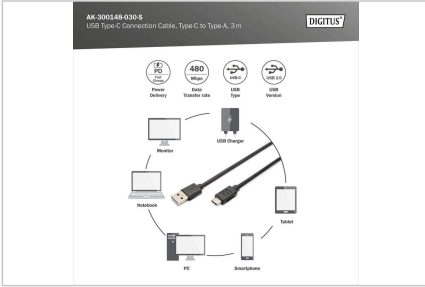

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)