


# DIGITUS

**DK-1644-015/Y**  
**EAN 4016032444466**

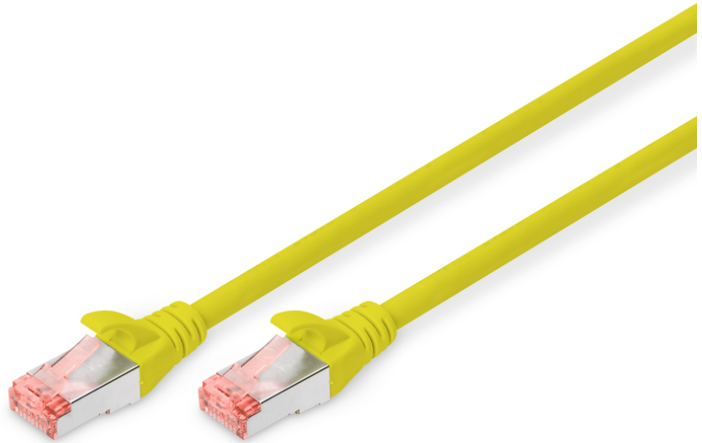

**CAT 6 S-FTP patch cable, Cu, LSZH AWG 27/7, length 1.5 m, color yellow**





## Attributes

- Slim Version: no
- Flat Version: no

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³    |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
| Packaging Unit Carton        | 150          | 7.50        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Inside        | 1            | 0.05        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Single        | 1            | 0.05        | 0.00       | 0.00       | 0.00        | 0.00   |
| Net single without Packaging | 0            | 0.00        | 0.00       | 0.00       | 0.00        | 222.89 |

## More images:

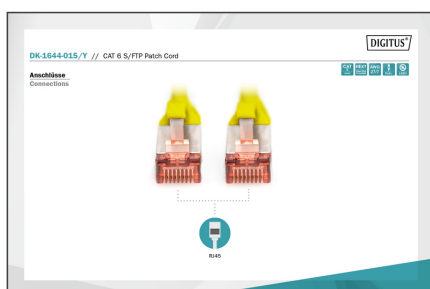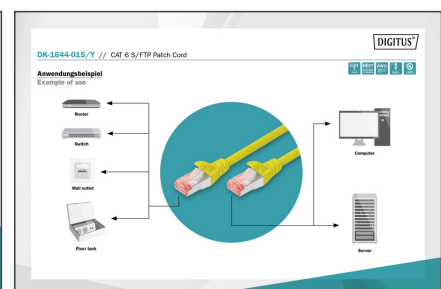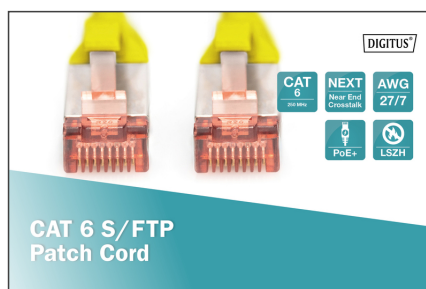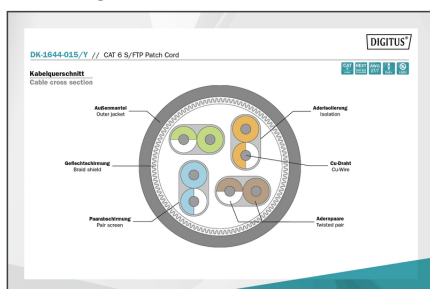

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)