

# DIGITUS USB Type-C Gen2 adapter / converter cable, Type-C to HDMI A

AK-300330-050-S  
EAN 4016032451327



## USB Type-C adapter cable, Type-C to HDMI A M/M, 5.0m, 4K/60Hz, 18GB, bl, gold

The USB Type-C 4K HDMI adapter / converter cable allows a direct connection of TV, monitor or projector to a USB-C device. The adapter / converter cable is a must-have accessory, whether you connect your Notebook privately to a TV or professionally for presentations via an HDMI projector.

**Connect your USB-C device directly to a monitor, TV or beamer - No need of an additional adapter.**

- Your USB-C equipped device must support video (DP alt mode) to work with this adapter / converter cable.
- Video output capability depends on the graphics card of your notebook and the connected monitor. Some screens also limit the available resolution.

- Support up to 4K/2K with 60Hz
- Supports digital transfer of audio signals, stereo
- Data transfer rate up to 18 Gbit/s

### Attributes


- AWG: 26
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: HDMI type A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 5 m
- USB-C Products: yes

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	11.40	35.00	26.00	24.00	21.84
Packaging Unit Inside	1	0.32	19.00	20.00	27.00	5.25
Packaging Unit Single	1	0.57	19.00	4.00	27.00	2.05
Net single without Packaging	0	0.19	17.50	4.00	15.00	1.05

### More images:



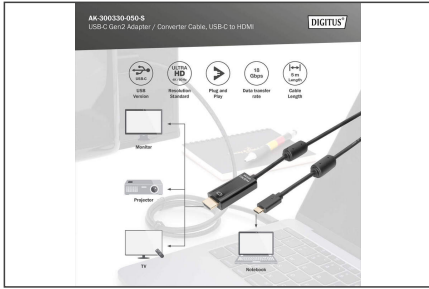

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)