

DIGITUS® USB-C™ 11-in-1 Docking Station with Aluminium Monitor Stand

DA-70881

EAN 4016032461609



USB-C Docking Station with Monitor Riser 11 Port, silver

The multifunctional docking station from DIGITUS® has everything you need to create a fully equipped and ergonomic workplace. The docking station, which is integrated into the beautifully designed aluminium monitor stand, extends your USB Type-C™ port by 11 additional ports. It offers an HDMI and a VGA port where two additional monitors can be used simultaneously, or where projectors or TVs can be connected (SST mode). In combination with your existing screen, this allows you to clone your desktop or extend it to a maximum of 3 screens. Additionally, the docking station is equipped with two USB-C™ ports, one of which features Power Delivery (PD). This allows you to charge your connected laptop while it is being used, while using the second port to connect additional devices with USB-C™ connectors. Modern smartphones, tablets, or an additional laptop with a USB-C™ port could be connected here, for example. Three additional USB 3.0 ports give you plenty of space to connect additional mobile devices, which can be charged while you are using them. Of course, USB accessories such as a mouse or keyboard can also be connected using the USB 3.0 port, as they are backwards-compatible with USB 2.0. Additionally, two card readers for SD/TF cards and MicroSD cards are also integrated, as is a gigabit Ethernet port. This allows you to connect your laptop to the local network or internet via the docking station using a network cable. The features of the desktop multi-tool are rounded off with a stereo audio jack, where you can use a microphone, speaker, or headset. With the multifunctional DIGITUS® docking station, you can expand your notebook's capabilities with just a single USB-C™ port while also enjoying the benefits of the ergonomic monitor stand.

Monitor stand and USB Type-C™ docking station in one - adds 11 additional ports to your system

- Universal multifunctional docking station integrated in a designer aluminium monitor stand
- Supports UHD up to 4K / 30 Hz (HDMI) & 1080p / 60 Hz (VGA)
- Supports dual screen - can be used with two monitors simultaneously
- USB-C™ version: USB 3.1 (Gen 1)
- 1 x HDMI port: UHD 4K / 30 Hz (3840 x 2160p)
- 1 x VGA port: Full HD (1920 x 1080p)
- 2 x USB-C™ (1 x data transfer / 1 x Power Delivery)
- 3 x USB 3.0 with SuperSpeed data transfer with up to 5 Gbps (backwards-compatible with USB 2.0)
- 1 x RJ45 Ethernet port with 10/100/1000 Mbps bandwidth
- 2 x card reader (SD/TF cards / microSD cards) - supports up to 2 TB

- 1 x audio stereo 3.5 mm jack (headset, headphones, mic)
- HDMI resolution: UHD 4 K / 30 Hz (3840 x 2160p), 1080p, 720p
- Supports SST - Single Stream Transport
- Supports HDMI version 1.4 (backwards-compatible)
- Supports DP Alt Mode for dual-screen function
- Power Delivery port: 100 W (20 V / 5 A) max.
- Chipsets: VL103R / IT6564 / VL817 / RTL8153 / GL3324 / SSS1629 / FE1.1S
- Operating temperature: 0 °C to 70 °C
- Operating humidity: 20% to 80% RH (non-condensing)
- Weight: 1360g
- Color: Silver
- Manufacturer's notice:
- USB 3.0 ports support max. 1 x HDD / SSD
- USB-C™ port must support DP Alt Mode to process HD signals.
- HDMI resolution 1080p / 60 Hz when used simultaneously with a VGA output.
- Not all USB-C™ ports support all functions of the USB Type-C™ standards. Make sure that your laptop's USB-C™ port supports the DisplayPort Alternate Mode (DP Alt Mode) as well as USB Power Deliver (PD).
- Measurements: W 39,6 x D 24 x H 6 cm
- Load capacity: 25kg max.

Attributes


- Housing: Aluminum
- LAN connector (RJ45): yes
- Resolution max.: 3840 x 2160 Pixel, 30Hz
- USB-C Power Delivery: 100W
- Card reader: yes
- Number of audio ports: 1
- Number of display ports: 2
- Number of network ports: 1
- Number of USB A ports: 3
- Number of USB-C ports: 2
- Number of video ports: 2
- USB-C Products: yes
- Video connection ports: HDMI, VGA

Package contents

- USB-C™ 11-in-1 docking station with aluminium monitor stand
- USB-C™ connection cable 14 cm

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	5	10.50	37.50	42.50	27.00	43,031.20
Packaging Unit Inside	1	2.10	23.00	41.60	8.00	7,654.40
Packaging Unit Single	1	2.10	23.00	41.60	8.00	7,654.40
Net single without Packaging	0	1.36	24.00	39.60	6.00	5,702.40

More images:

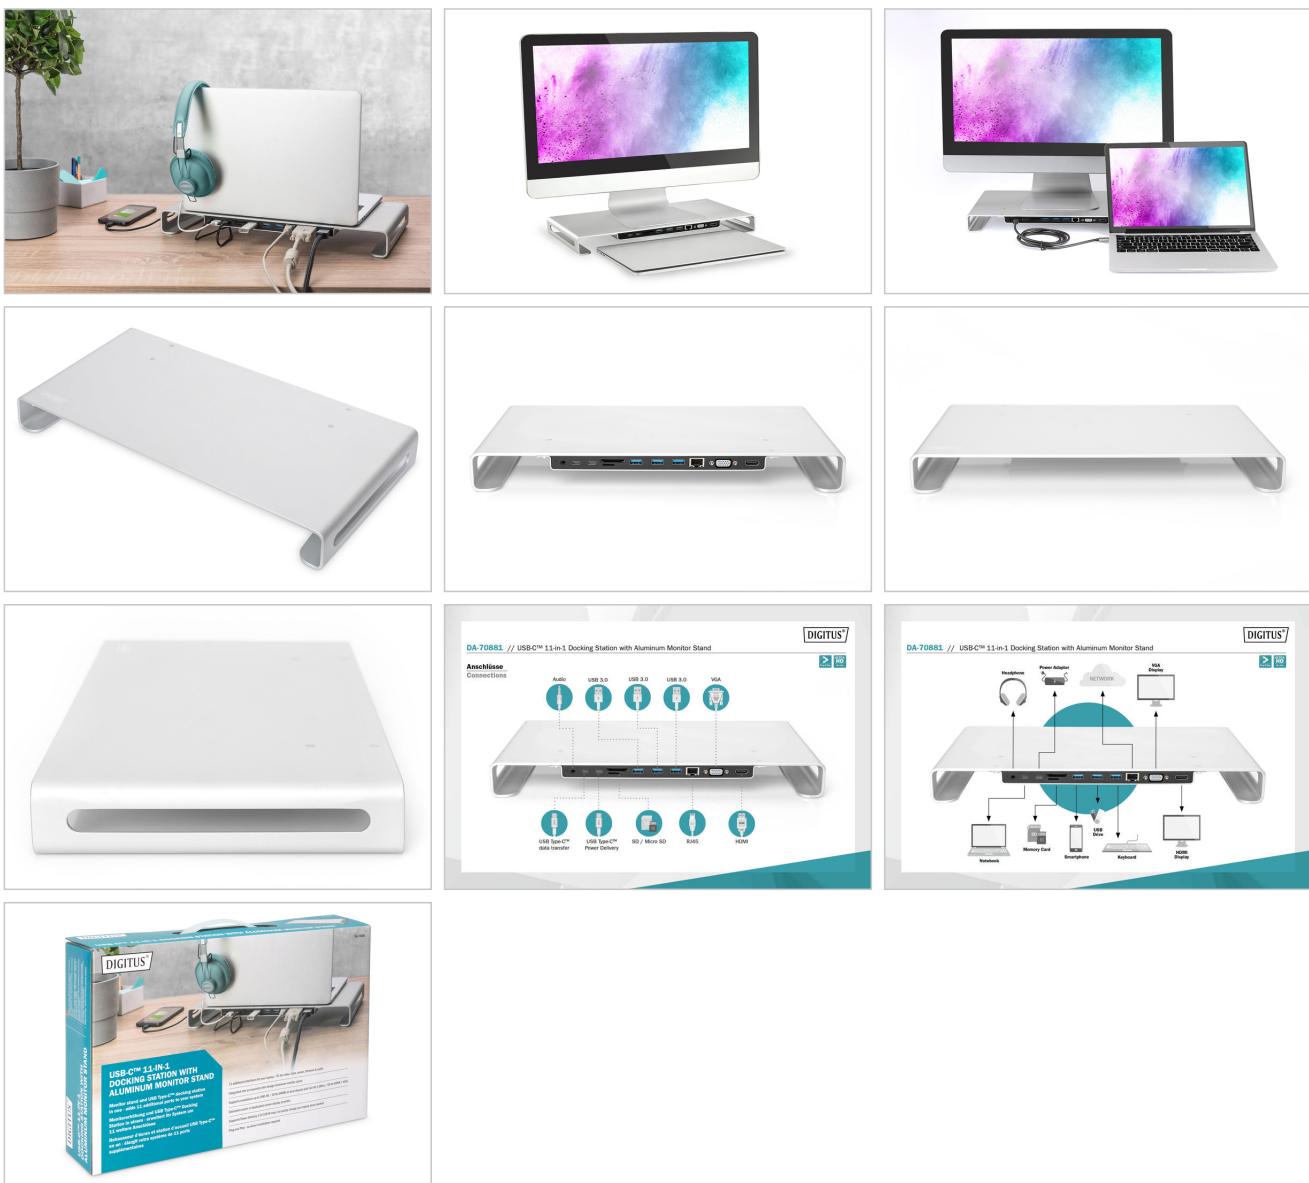

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.

- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com