


DIGITUS Network Rack Unique Series - 800x1000 mm (WxD)

DN-31128
EAN 4016032476788

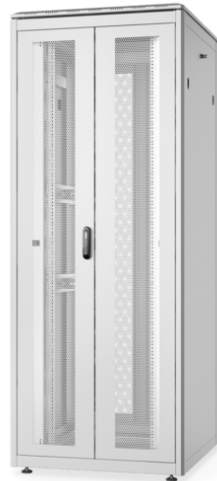

42U network cabinet, Unique, 2053x800x1000 mm double perforated doors, grey

The Network Racks of the Unique Series were designed for the user friendly installation of active- and passive network components accompanied by a neat cable management. Each rack consists of up to 1.5 mm strong steel sheet material which ensures a very good stability as a robust steel construction due to special plate curving technique. The color is created by powder coating in grey (RAL 7035) and black (RAL 9005). For certain conditions, where the set-up location is difficult to reach, the rack can be disassembled. Doors can be easily detached and the door stop can be changed from right to left. The roof is present with an added lid which contains air ventilation slots for a better air circulation. Furthermore the roof is ready for the mounting of an air ventilation unit. Each network rack contains 2 pairs (4 pieces) of 483 mm (19") profile rails inside which are galvanized and with height unit marking (countable from both directions). They are variable in depth and connected with additional depth support bars to realize extensive 483 mm (19") equipment installations. An important aspect for each installation is the cable management. The base of each rack is equipped with a sliding cable entry panel with rubber sealing. Racks from 26U are equipped with two cable entries with brush strips on the rear side above- and underneath the door. For cabinets with 800 mm width, the possibilities of cable management get enhanced with additional cable entries with brushes left and right in the top and base chassis. Furthermore there are mounted vertical cable ducts with shutter left and right to the 483 mm (19") profile rails in the front (on cabinets from 800 mm width). An extensive portfolio of accessories for cable management, shelves, etc. will help to meet many requirements in daily use.

The DIGITUS® Professional Unique Series is made for high demand IT-Infrastructure Solutions - designed and developed on highest standard in Germany

- Steel front and rear door with 70% perforation, double folding

- Locking system with swiveling lever handle on the front and rear door (prepared for profile half cylinder; adapter included)
- 1-point-locking-mechanism on all doors
- 120° door opening angle on front- and rear doors
- Side panels are lockable and removable
- incl. 4 pieces of leveling feet already pre-configured under the rack
- 483 mm (19") profile rails mounted on the front- and rear side inside of the rack, galvanized
- 483 mm (19") profile rails are adjustable in depth and with height unit marking
- Built-in depth support bars for more stability
- Sliding cable entry with rubber sealing on the base
- Special roof construction for fan unit with added lid which can be unmounted
- Special roof construction for fan unit with added lid which can be unmounted
- Several earthing points for rack components
- Equipment mounting depth min.-max.: 688-943 mm
- IP protection class: IP20
- Color: light grey, RAL 7035
- Depth: 1000 mm
- Front door: Steel door, perforated, double opening
- Units: 42
- Load capacity: 800 kg
- Mounted: yes
- Rear door: Steel door, perforated, double opening
- Side panels: Both sides
- Cabinet type: Network cabinet
- Width: 800 mm

Package contents

- 1x Network cabinet
- Installation set (36 x screws, 36 x captive nuts, 36 x washers)
- 1x Adapter for profile half-cylinder
- 4x Grounding cables (incl. nuts and washers)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	0	149.00	85.00	105.00	210.30	1,876,930.00
Packaging Unit Inside	1	149.00	85.00	105.00	210.30	1,876,930.00
Packaging Unit Single	0	149.00	85.00	105.00	210.30	1,876,930.00
Net single without Packaging	0	146.00	80.00	100.00	205.30	1,642,400.00

More images:

