

# DIGITUS® 4K HDMI adapter cable - HDMI to DisplayPort

AK-330111-020-S  
EAN 4016032481119



**HDMI to DP Adapter Cable, ext. Power via USB - A 2.0m, Ultra HD, 4K@60Hz, bi**

Expand your workplace with the DIGITUS 4K HDMI adapter cable from HDMI to DisplayPort. Simply connect your laptop or PC to a second monitor and benefit from a better overview and increased productivity. The cable transmits video and audio signals in razor-sharp 4K quality (3840 x 2160 @ 60 Hz) with brilliant colors and clear sound reproduction in 7.1 surround sound. In most cases, the power supply via the HDMI connection is sufficient. The additional USB-A plug can be connected for a stable power supply if required.

**This HDMI to DisplayPort adapter cable makes it easy to connect an HDMI input to a DisplayPort output and transmit picture and sound in 4K quality.**

- Ultra HD resolutions up to 4K (3840 x 2160 @ 60 Hz)
- Resolutions up to 2K at 30 Hz
- Full HD resolution up to 1920 x 1080 at 120 Hz
- 7.1-channel surround audio support
- Vivid colors thanks to 48-bit Deep Color support
- Support for 3D video formats
- Compatible with Embedded DisplayPort (eDP)
- Precise color reproduction thanks to 16-bit RGB/YCC conversion

- Automatic color conversion between YUV and RGB
- Compatible with HDMI 2.0 and DisplayPort 1.2
- HDCP 1.4 and DPCP - Compatible for protected content
- Connection 1: HDMI type - A (plug)
- Connection 2: DisplayPort (plug)
- Connection 3: USB- A (power supply)(plug)

**Attributes**


- AWG: 30
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: plastic
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

**Package contents**

- 1x 4K HDMI adapter cable - HDMI to DisplayPort

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	7.92	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.13	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.13	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	432.00

**More images:**

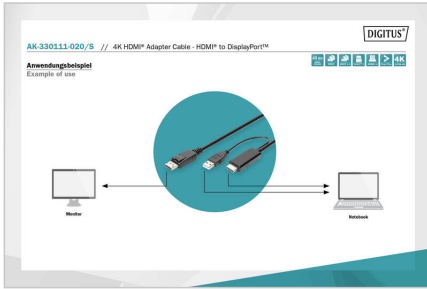

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)